


# 5-5/8" Diameter (Open Lead End) - Outdoor Ball and Sleeve Bearing


## Condensers - Heat Pump - Refrigeration

### Features:


- Energy Efficient \$
- Permanent Split Capacitor
- Class B Insulation
- Ball or Sleeve Bearing
- 1/2" Dia. Flatted Shaft
- 26" (Minimum) to 48" Leads
- 60 HZ
- All Angle Mount
- 60°C Ambient
- Auto Protector
- Reversible
- 4, 6, and 8 Pole
- Extended Thru Bolts




0500, 735




FS1024S

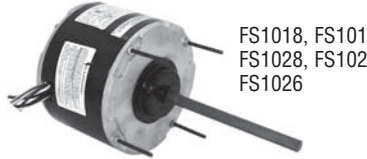


FS1018, FS101  
FS1028, FS102  
FS1026

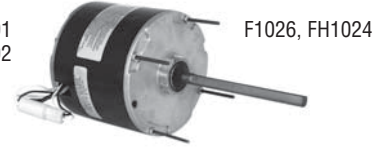


F1026, FH1024



F1026S



F1018S, F1028S




474A, 782A,  
782

### DRIPPROOF - VERTICAL SHAFT UP/HORIZONTAL

HP	RPM	Volts	Speeds	Amps		Insulation Class	Ambient	Stock Number	Bearings	Capacitor	Dim. Ref.	Notes
				Rated	Max.							
1/6	825	208-230	1	1.1	1.6	B	60°C	<b>F1018S</b>	Ball	5MFD-370V	12	9,27,98,\$
1/6	825	208-230	2	.9	1.3	B	60°C	<b>FS1018</b>	Sleeve	5MFD-370V	4	9,25,317,\$
1/6	1075	208-230	2	.9	1.1	B	60°C	<b>FS1016</b>	Sleeve	5MFD-370V	1	6,9,25,317,\$
1/4	825	208-230	1	1.5	1.9	B	60°C	<b>F1028S</b>	Ball	5MFD-370V	13	9,27,98,\$
1/4	825	208-230	1	1.5	1.5	B	60°C	<b>474A</b>	Sleeve	7.5MFD-370V	6	9,164,315,\$ <b>New!</b>
1/4	825	208-230	2	1.5	1.9	B	60°C	<b>FS1028</b>	Sleeve	7.5MFD/370V	14	9,25,317,\$
1/4	1075	208-230	1	1.4	2.0	B	60°C	<b>F1026S</b>	Ball	5MFD-370V	7	9,25,311,\$
1/4	1075	208-230	1	1.4	1.9	B	60°C	<b>0500</b>	Sleeve	7.5MFD-370V	15	1,10,164,317,\$
1/4	1075	208-230	1	1.5	1.9	B	60°C	<b>FS1026S</b>	Sleeve	5MFD-370V	3	9,147,317,\$
1/4	1075	208-230	1	2.1		B	60°C	<b>735</b>	Sleeve	5MFD-370V	15	1,10,25,317,\$
1/4	1075	208-230	2	1.4	2.0	B	60°C	<b>F1026</b>	Ball	5MFD-370V	7	25,37,311,\$
1/4	1075	208-230	2	1.4	2.0	B	60°C	<b>FS1026</b>	Sleeve	5MFD-370V	2	6,9,25,317,\$
1/4	1625	208-230	1	1.4	1.8	B	60°C	<b>FS1024S</b>	Sleeve	5MFD-370V	5	6,9,31,147,313,\$
1/4	1625	460	2	.93		B	60°C	<b>782</b>	Ball	5MFD-370V	11	1,9,25,38,67,\$
1/4	1625	460	2	.74		B	60°C	<b>782A</b>	Ball	5MFD-370V	8	9,25,38,67,\$
1/4	1625	460	2	.9	1.2	B	60°C	<b>FH1024</b>	Ball	5MFD-370V	9	9,25,54,311,\$

### Notes:

- Item to be discontinued when stock is depleted.
- 60/50 HZ
- Reversing Plug
- Reversible. Quick connect terminals
- Has hex mounting hub on both ends for cradle base mounting
- Extended thru bolts, both ends
- 40 degree C Ambient
- Lead reversible, no plug
- Includes conduit box, mounting screws, gasket, shipped detached
- Rewire for second speed
- 1/2" hub on shaft end and slinger
- Resilient rings included for refrigeration applications
- No hub on lead end end frame
- 1/2" Dia. Shaft - Single Flat
- 1" extended thru bolts each end
- 1-7/8" shaft end, 1/2" lead end extended thru bolts
- 1-5/8" extended thru bolts



### Approximate Dimensions

Ref.	BM	C	N	T	T1
1	3.86	10.30	6.44		1.63
2	4.24	10.68	6.44		1.63
3	3.99	10.43	6.44		1.63
4	4.18	10.18	6.00		1.63
5	3.99	8.92	4.93	1.00	1.00
6	5.00	11.02	6.02	.55	1.86
7	4.36	10.80	6.44		1.63
8	4.86	10.55	6.06		.49
9	4.86	11.30	6.44		1.63
10	3.75	10.23	6.48		1.61
11	4.75	10.81	6.06		0.49
12	4.11	10.11	6.00	.94	.88
13	4.61	10.62	6.01	.88	.88
14	4.93	10.93	6.00		1.63
15	4.61	10.27	6.52		1.61