



---

# Customer information packet

## M1208T

5/1.3HP, 1725/850RPM, 3PH, 60HZ, 184T, 3634M

Class - None

Division - Not Applicable

## Specifications

Enclosure	OPEN
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ 1.300 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	6.600 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.5 a
Insulation Class	F
Inverter Code	Not Inverter

## Part detail

Revision	Y
Type	AC
Mech. spec.	36B001
Base	
Status	PRD/A
Elec. spec.	36WGW582
Layout	36LYB001
Eff. date	05-08-2024
CD Diagram	CD0032
Poles	04/08
Leads	6#16
Proprietary	False
Created date	01-01-0001

<b>KVA Code</b>	J
<b>Lifting Lugs</b>	No Lifting Lugs
<b>Locked Bearing Indicator</b>	No Locked Bearing
<b>Motor Lead Exit</b>	Ko Box
<b>Motor Lead Quantity/Wire Size</b>	6 @ 16 AWG
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	3634M
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	4 8
<b>Overall Length</b>	15.00 IN
<b>Product Family</b>	General Purpose
<b>Pulley End Bearing Type</b>	Ball
<b>Pulley Face Code</b>	Standard
<b>Pulley Shaft Indicator</b>	Standard
<b>Rodent Screen</b>	None
<b>Service Factor</b>	1.00
<b>Shaft Diameter</b>	1.125 IN
<b>Shaft Extension Location</b>	Pulley End
<b>Shaft Ground Indicator</b>	No Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Shaft Slinger Indicator</b>	No Slinger
<b>Speed</b>	1725 rpm 850 rpm
<b>Speed Code</b>	2S-1W-VT
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	None
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	None
<b>Winding Thermal 2</b>	None

**Nameplate**

<b>NP1256L</b>									
<b>CAT.NO.</b>	M1208T								
<b>SPEC.</b>	36B01W582								
<b>HP</b>	5/1.3								
<b>VOLTS</b>	460								
<b>AMP</b>	6.6/2.5								
<b>RPM</b>	1725/850								
<b>FRAME</b>	184T		<b>HZ</b>	60		<b>PH</b>	3		
<b>SER.F.</b>	1.15	<b>CODE</b>	J	<b>DES</b>	B	<b>CLASS</b>	F		
<b>NEMA-NOM-EFF</b>		<b>PF</b>							
<b>RATING</b>	40C AMB-CONT								
<b>CC</b>									
<b>DE</b>	6206		<b>ODE</b>	6205					
<b>ENCL</b>	OPEN	<b>SN</b>							

**Accessories**

<b>Part number</b>	<b>Description</b>	<b>Multiplier</b>
36-3403	C FACE KIT	A8
36EP1405A09SP	D-FLANGE KIT	

**AC Induction Motor Performance Data**

Record # 36961

Typical performance - not guaranteed values

Winding: 36WGW582-R001		Type: 3634M	Enclosure: TEFC
<b>Nameplate Data</b>		<b>460 V, 60 Hz: High Speed Connection</b>	
Rated Output (HP)	5/1.3	Full Load Torque	15.3 LB-FT
Volts	460	Start Configuration	direct on line
Full Load Amps	6.6/2.5	Breakdown Torque	50 LB-FT
R.P.M.	1725/850	Pull-up Torque	31 LB-FT
Hz	60 Phase	Locked-rotor Torque	34 LB-FT
NEMA Design Code	B KVA Code	Starting Current	48 A
Service Factor (S.F.)	1	No-load Current	3.2 A
NEMA Nom. Eff.	0 Power Factor	Line-line Res. @ 25°C	3.95 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	67°C

**Load Characteristics 460 V, 60 Hz, 5 HP**

% of Rated Load	25	50	75	100	125	150
Power Factor	48	69	80	86	87	87
Efficiency	72.3	80.9	83.2	82.9	81.6	80
Speed	1780	1762	1743	1720	1698	1670
Line amperes	3.5	4.3	5.4	6.6	8.1	9.8


ABB Motors and Mechanical Inc.

WINDING # 36WG582

5 HP 3 PH 60 HZ 1720 RPM 460 V 3634M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=50 PU=31 LR=34 LRA=48

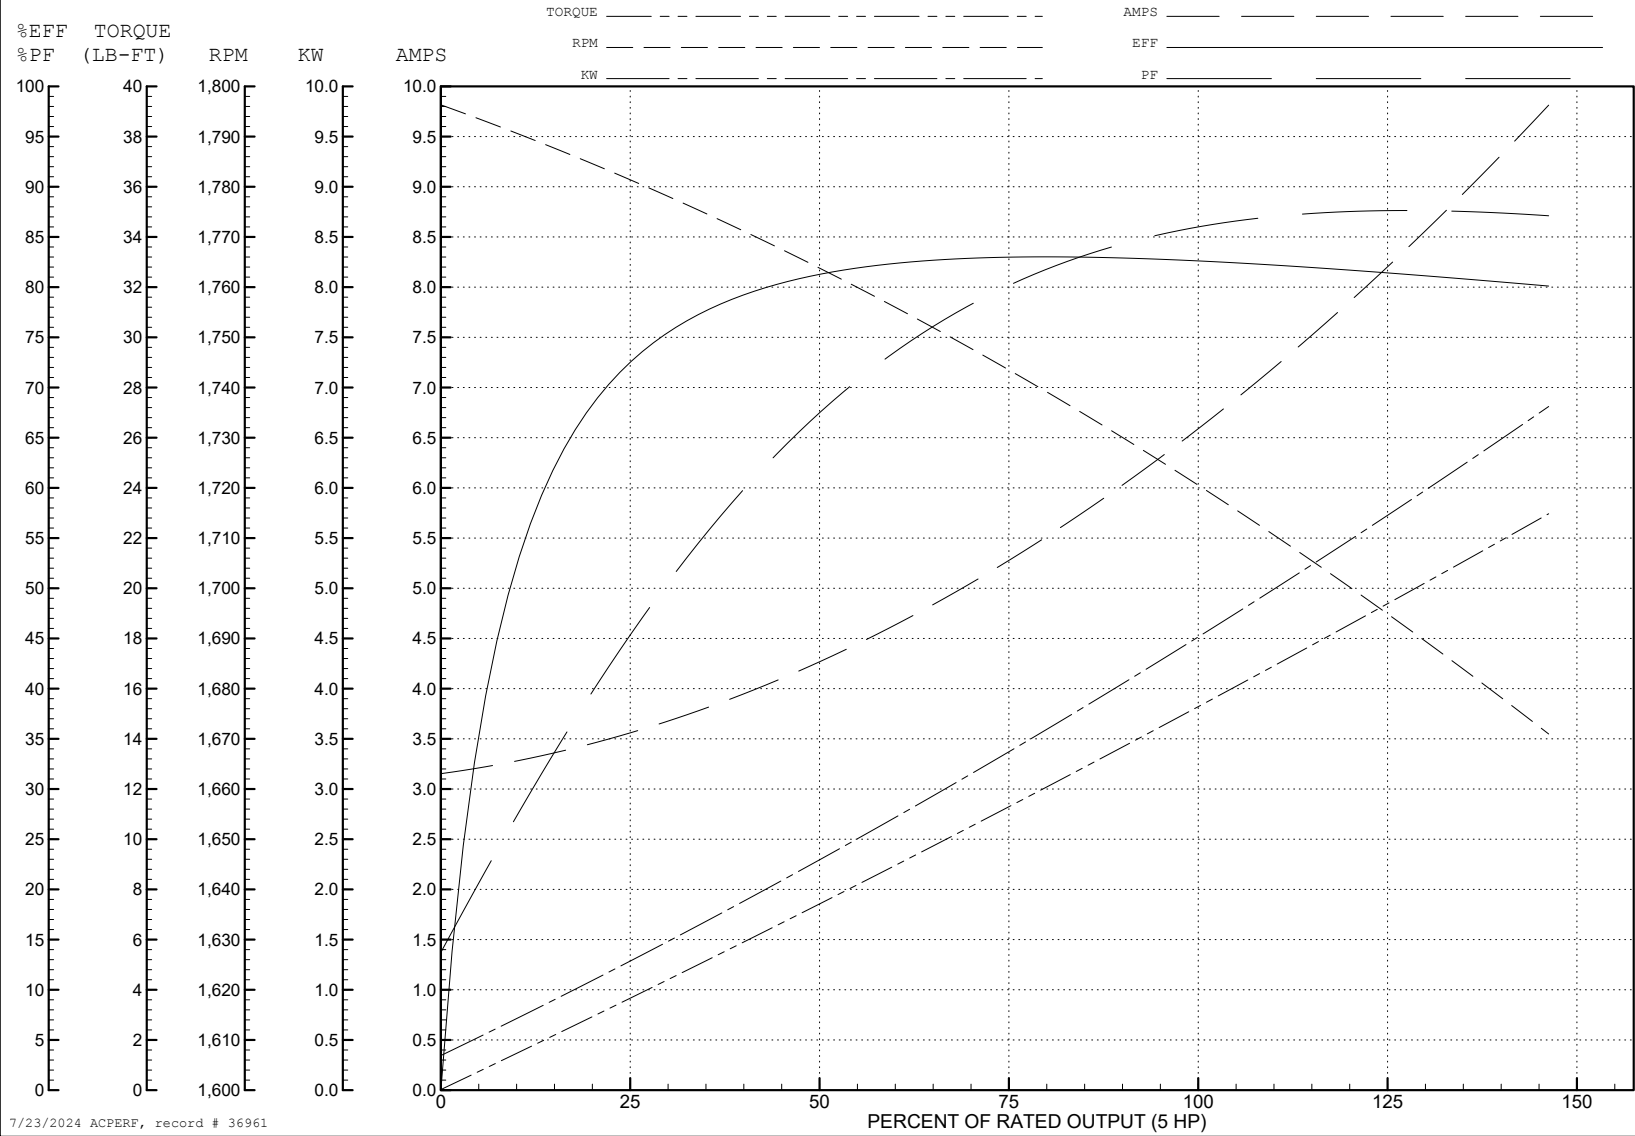

7/23/2024 ACPERF, record # 36961

**AC Induction Motor Performance Data**

Record # 36962

Typical performance - not guaranteed values

<b>Winding: 36WGW582-R001</b>		<b>Type: 3634M</b>		<b>Enclosure: TEFC</b>	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: Low Speed Connection</b>		
<b>Rated Output (HP)</b>	5/1.3		<b>Full Load Torque</b>	8 LB-FT	
<b>Volts</b>	460		<b>Start Configuration</b>	direct on line	
<b>Full Load Amps</b>	6.6/2.5		<b>Breakdown Torque</b>	19 LB-FT	
<b>R.P.M.</b>	1725/850		<b>Pull-up Torque</b>	10 LB-FT	
<b>Hz</b>	<b>60 Phase</b>	3	<b>Locked-rotor Torque</b>	11.5 LB-FT	
<b>NEMA Design Code</b>	<b>B KVA Code</b>	J	<b>Starting Current</b>	9.6 A	
<b>Service Factor (S.F.)</b>	1		<b>No-load Current</b>	1.8 A	
<b>NEMA Nom. Eff.</b>	<b>0 Power Factor</b>	0	<b>Line-line Res. @ 25°C</b>	15.8 Ω	
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>	54°C	

**Load Characteristics 460 V, 60 Hz, 1.3 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>
<b>Power Factor</b>	32	47	59	67	71	73
<b>Efficiency</b>	51.8	65.8	71	72.6	72.2	70.3
<b>Speed</b>	886	875	863	849	833	812
<b>Line amperes</b>	1.9	2	2.2	2.5	2.9	3.4




ABB Motors and Mechanical Inc.

WINDING # 36WGW582


Typical performance - not guaranteed values.

1.3 HP 3 PH 60 HZ 849 RPM 460 V 3634M



TORQUES (LB-FT): PO=19 PU=10 LR=11.5 LRA=9.6

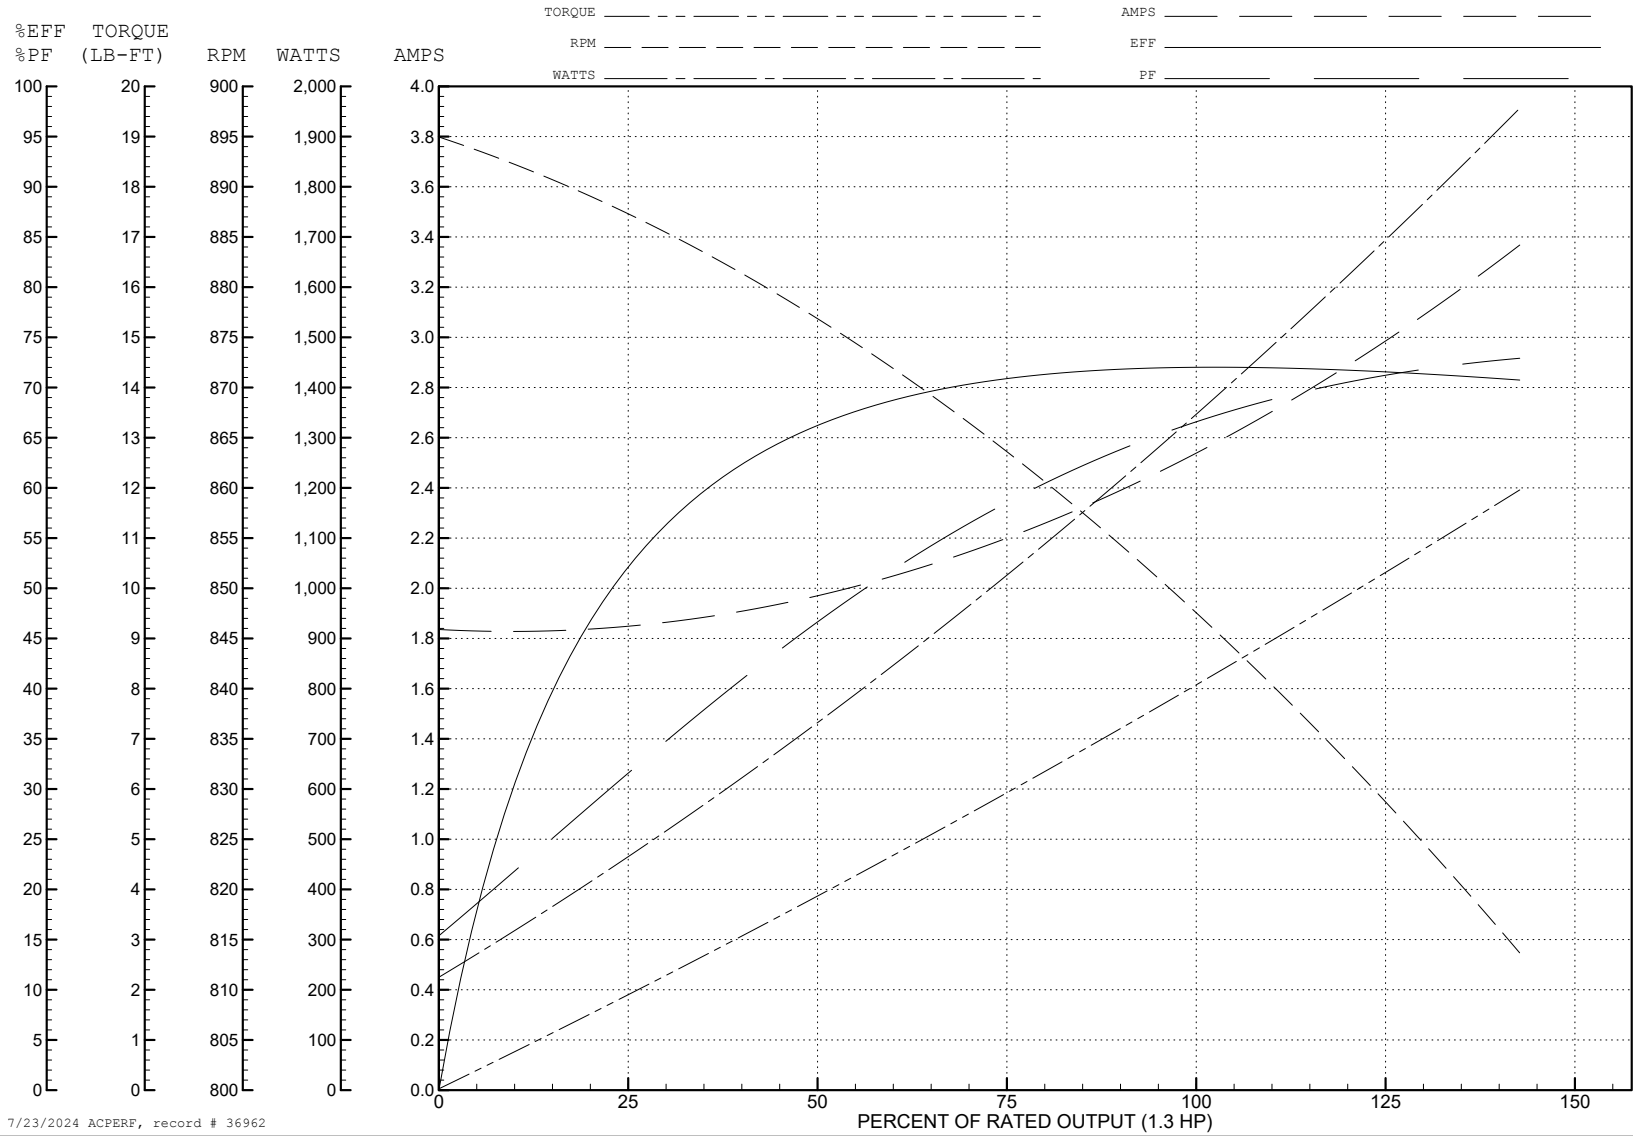

7/23/2024 ACPERF, record # 36962

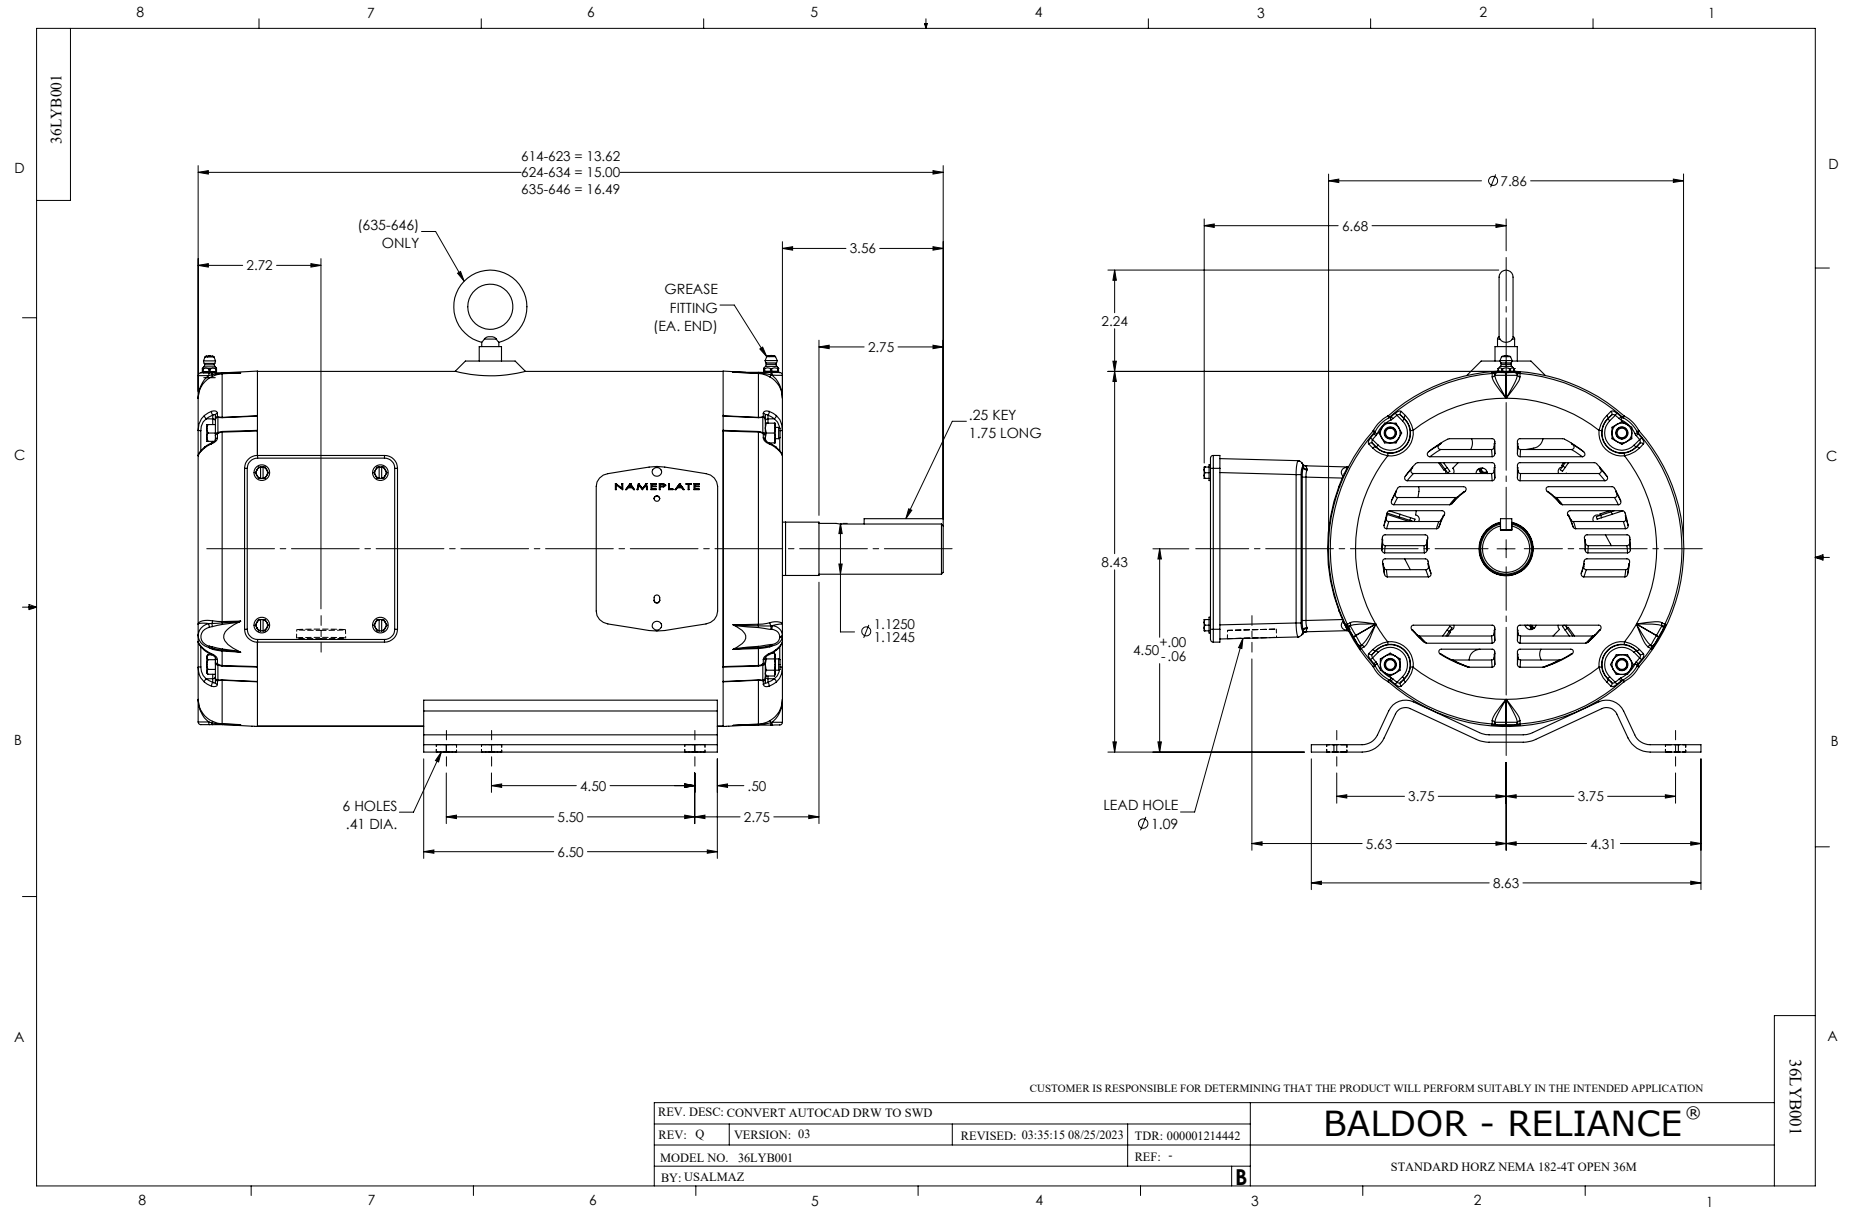

CD0032

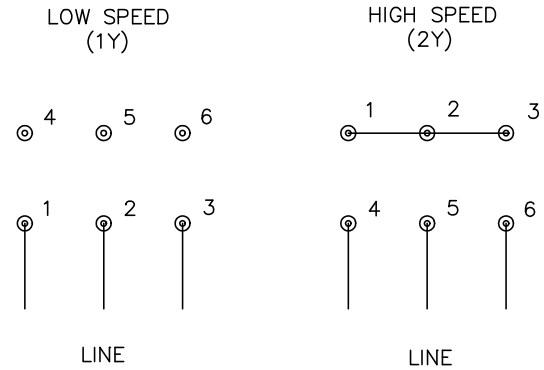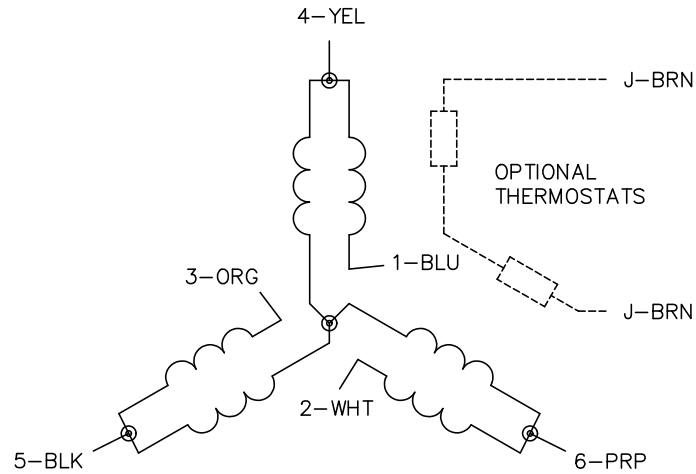

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0032

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/22/99 8:27	TDR: 0171435
CD0032		FILE: AAA00005145	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

3PH, SV, 6 LEADS, 2-SPEED 1-WINDING VARIABLE TORQUE