


Permanent Split Capacitor Packaged Terminal A/C-Heat Pump 5.0" Diameter, Open, Air Over

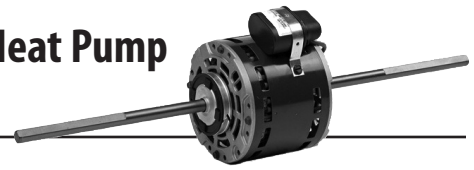

APPLICATIONS:

Designed to meet manufacturer's requirements for use in package terminal air conditioners or heat pump units.

FEATURES:

- Sleeve Bearings Have All Angle Thrust System
- Designed for Use with 370V Capacitors
- Continuous Duty, Air Over
- Automatic Reset Thermal Overload Protector
- **Discount Symbol: DS-3HAC**

Single Shaft, Direct Drive Blower

HP	RPM/Spds.	Volts	Catalog Number	List	Bearings	Cap MFD	Amps	Shaft N	Shaft XN	Shell XI	Total C	Mount	Ship Wgt.	Notes	OEM
1/30	1075/3	115	1374	\$250	Slv	5.0	.50	8.5	-	4.1	13.4	Resilient	10	64	TR
	1100/3	115	4125	\$200	Slv	4.0	.53	8.0	-	4.1	13.7	Resilient	6	64	IE
	1075/3	265	4126	\$162	Slv	3.0	.39	7.0	-	3.8	10.8	Flex	6		IE
1/20	1100/3	115	1676	\$281	Slv	5.0	.55	8.7	-	3.3	13.1	Resilient	9	64	TR
	1100/3	265	1965	\$172	Slv	4.0	.45	3.5	-	4.3	7.8	3 Lugs	10	R	AM
	1075/3	208-230	4136	\$212	Slv	5.0	.55	6.5	-	4.1	10.6	Flex	8		IE
	1075/3	265	1959	\$180	Slv	3.0	.40	6.5	-	4.1	10.6	Flex	8		IE
	1075/3	277	4137	\$186	Slv	4.0	.55	6.5	-	3.4	9.9	3 Lugs	8		IE
1/16	850/3	277	1678	\$190	Slv	4.0	.50	2.3	-	4.1	6.3	3 Lugs	12	64	TR
1/15	1075/3	265	1961	\$185	Slv	4.0	.60	7.0	-	3.8	10.8	Flex	12		IE
1/10	1050/3	277	1958	\$176	Slv	4.0	.65	4.0	-	4.1	8.1	Flex	12	64	
1/5	925/3	208-240	4129	\$176	Slv	6.0	1.9	7.0	-	4.6	11.6	Flex	12		IE
1/4	925/3	115	4130	\$191	Slv	12.5	6.0	7.0	-	4.8	11.8	Flex	13		IE
	1050/3	277	1962	\$201	Slv	7.5	1.6	7.0	-	5.1	12.6	Flex	13		IE
	1075/3	265	4131	\$199	Slv	10.0	1.6	5.25	-	4.8	10.1	Flex	13		IE

Dual Shaft, Direct Drive Blower

HP	RPM/Spds.	Volts	Catalog Number	List	Bearings	Cap MFD	Amps	Shaft N	Shaft XN	Shell XI	Total C	Mount	Ship Wgt.	Notes	OEM
1/15	1100/3	115	1090	\$294	Slv	5.0	.8	9.7	10.8	3.8	25.4	Resilient	7		TR
1/12	1150/3	277	1960	\$189	Slv	5.0	.7	7.6	8.3	4.3	21.2	Hub Ring	9	64	IE
	1375/3	115-127	4127	\$206	Slv	6.0	1.35	8.0	8.25	3.8	21.2	Hub Ring	9	64	IE
1/10	1050/3	277	1957	\$192	Slv	4.0	.7	8.0	8.0	3.8	20.9	Hub Ring	9	64	
1/8	1500/3	277	1963	\$214	Slv	-	2.3	6.5	6.5	3.8	17.9	Resilient	10	H41	
	1500/3	277	1964	\$218	Slv	4.0	.8	7.8	8.3	4.1	21.2	Resilient	10	64	
1/6	1050/3	115	1955	\$201	Slv	4.0	2.8	8.0	8.0	3.8	20.9	Hub Ring	11	64	
	1450/3	115-127	4128	\$221	Slv	5.0	2.55	8.0	8.3	4.1	21.4	Hub Ring	11	64	IE
	1625/4	115	8525	\$239	Slv	5.0	2.2	8.0	8.0	4.2	21.2	Resilient	12		

AM = Amana IE = IEC TR = Trane

Note 64 Capacitor Supplied
Note H41 Shaded Pole

Note R Reversible

† All marks shown within this document are properties of their respective owners



DRIVES
BRAKE MOTORS
GENERAL PURPOSE SINGLE PHASE
HVAC
WASHDOWN
AGRICULTURE
COMMERCIAL PUMP MOTORS
CLOSE COUPLED PUMP MOTORS
FIRE PUMP MOTORS
POOL & SPA MOTORS
RESIDENTIAL WATER PUMP
ELEVATOR AND GATE & DOOR