

Three Phase Commercial Belt-Drive Blower Motor

Open Dripproof, Air Over Not Required




APPLICATIONS:

Designed to meet manufacturer's requirements for belt-drive blowers in commercial air conditioning applications where 3 phase power is required.

FEATURES:

- Automatic Reset Thermal Overload Protector
- Reversible Rotation
- Continuous Duty
- Double Contact Sealed Ball Bearings
- Dual Voltage
- Class B Insulation
- 104°F (40°C) Ambient
- **Discount Symbol: DS-3HAC**

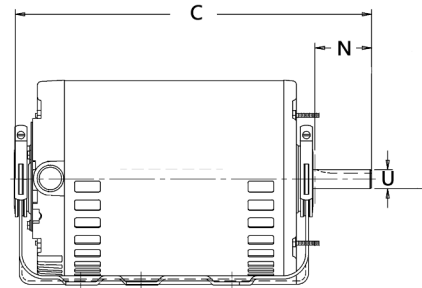

Rigid Base Mount

HP	RPM	Volts	Catalog Number	List	Bearings	NEMA Frame	Amps	Shaft Length (N)	Shaft Dia. (U)	SF	Total Length (C)	Ship Wgt.	Notes	OEM
1	1725	208-230/460	1813	\$450	Ball	56	3.4/1.7	1.9	.625	1.15	11.9	24	VC	
1-1/2	1725	208-230/460	1814	\$508	Ball	56H	5.0/2.5	1.9	.625	1.15	12.4	27	VC, H12	
	1725	200-230/460	7913	\$504	Ball	56HZ	5.0/2.5	2.3	.875	1.15	12.4	39		LE
2	1725	208-230/460	1815	\$554	Ball	56H	6.6/3.3	1.9	.625	1.15	12.4	29	VC	
	1725	200-230/460	7914	\$539	Ball	56HZ	7.6-7.8/3.9	2.3	.875	1.15	12.4	45		LE
	1725	208-230/460	8461	\$762	Ball	145T	6.3-6.2/3.1	2.3	.875	1.00	12.5	37	H18, H45, 25	
3	1725	200-230/460	7915	\$666	Ball	56HZ	9.0-9.2/4.6	2.3	.875	1.15	13.3	48		LE

Resilient Mount

HP	RPM	Volts	Catalog Number	List	Bearings	NEMA Frame	Amps	Shaft Length (N)	Shaft Dia. (U)	SF	Total Length (C)	Ship Wgt.	Notes	OEM
1/3	1725	208-230/460	8496	\$377	Ball	56	1.5-1.6/0.8	1.9	.625	1.0	10.3	18	H8, H18	
1/2	1725	208-230/460	8488	\$501	Ball	56	2.1-2.2/1.1	1.9	.625	1.25	10.3	20		
3/4	1725	208-230/460	8489	\$550	Ball	56	2.9-2.9/1.5	1.9	.625	1.25	10.8	22		
1	1725	208-230/460	8498	\$485	Ball	56	4.3/2.2	1.9	.625	1.25	11.3	26		
	1725	208-230/460	8460	\$516	Ball	56	3.0/1.5	1.9	.625	1.00	11.1	27	H45	
1-1/2	1725	208-230/460	8490	\$609	Ball	56H	5.2-5.1/2.6	1.9	.625	1.15	12.8	32		
	1725	208-230/460	8491	\$781	Ball	145T	5.0-4.6/2.4	2.3	.875	1.15	13.2	40		
2	1725	208-230/460	8493	\$699	Ball	56H	6.1-6.3/3.1	1.9	.625	1.15	12.8	41		
	1725	208-230/460	8494	\$785	Ball	145T	6.1-6.3/3.1	2.3	.875	1.15	13.2	44		

LE = Lennox

Note 25 No Protector
 Note H8 5.6" Diameter
 Note H12 Base Has Holes For 56 & 56H

Note H18 Conduit Box
 Note H45 Totally Enclosed Air Over
 Note VC Quick Voltage Change Device



DRIVES
 BRAKE MOTORS
 GENERAL PURPOSE SINGLE PHASE
 HVAC
 WASHDOWN
 AGRICULTURE
 COMMERCIAL PUMP MOTORS
 CLOSE COUPLED PUMP MOTORS
 FIRE PUMP MOTORS
 POOL & SPA MOTORS
 RESIDENTIAL WATER PUMP
 ELEVATOR AND GATE & DOOR