


Permanent Split Capacitor Condenser Fan

5.6" Diameter, Totally Enclosed Air Over (TEAO)




APPLICATIONS:

Residential and commercial condensing unit fan motors to meet manufacturer's requirements.

FEATURES:

- 140°F (60°C) Ambient Design
- Sleeve Bearings have All Angle Thrust System
- Class B Insulation
- Designed for use with 370V Capacitors
- Extended Studs
- 30° Leads
- Hubless Lead End
- Drain Holes Both Ends
- Reversible Rotation
- Automatic Reset Thermal Overload Protector
- Continuous Duty
- **Discount Symbol: DS-3HAC**

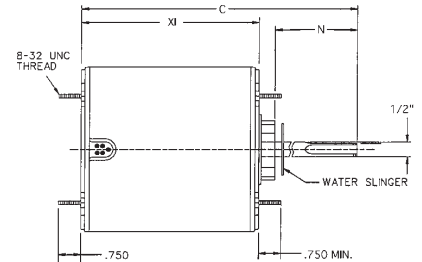

Stud Mount, Without Capacitor, High Ambient Design, All Angle Mount

HP	RPM	Volts	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wgt.	Notes	OEM
1/12	1100	208-230	3401		Slv	5.0	0.7	1.6	4.1	5.7	9		CA
1/10	825	208-230	1871		Slv	3.0	1.0	6.0	3.8	10.4	10		
	1100	208-230	3402		Slv	5.0	0.8	1.6	4.1	5.7	9		CA
1/8	825	208-230	1872		Slv	5.0	0.8	6.0	4.1	10.6	11	72	
	825	208-230	5456		Slv	5.0	1.2	3.8	4.1	7.8	11	72	RH
1/6	825	208-230	1873		Slv	5.0	1.0	6.0	4.1	10.6	12	72	
	825	208-230	5457		Slv	7.5	1.2	3.8	4.6	8.3	13	72	RH
	825/2	208-230	8673		Slv	5.0	1.0	6.0	4.4	10.9	14		
	1075	208-230	1859		Slv	5.0	1.0	5.0	3.8	9.4	11		
1/5	1075	208-230	5450		Slv	3.0	1.3	3.7	3.8	7.5	11	72	RH
	1075	208-230	5454		Slv	3.0	1.7	3.7	3.8	8.1	11	72	RH
1/4-1/8	825	208-230	1874		Slv	5.0	2.0	6.0	4.3	10.9	13	72	
1/4	825	460	1880		Ball	5.0	1.0	6.0	5.1	11.6	14		
	840	208-230	1123		Slv	5.0	1.4	2.5	4.6	7.6	16		IC
	850	208-230	1743		Slv	5.0	1.5	2.8	4.6	7.3	10		YK
	825/2	208-230	8674		Slv	7.5	2.0	6.0	4.6	11.1	15		
	1075	208-230	1860		Slv	5.0	1.7	5.0	4.1	9.6	12		
	1075	208-230	1876		Ball	5.0	1.7	5.0	4.1	9.6	11		
	1075	460	3736		Ball	7.5	0.8	6.0	4.6	11.1	12		
	1100	208-230	3404		Slv	5.0	1.8	1.6	4.6	6.2	12		CA
1/3	1625	208-230	1890		Slv	5.0	1.4	5.0	4.3	9.9	12		
	825	208-230	1875		Slv	7.5	2.4	6.0	5.1	11.6	17	72	
	825	460	1881		Ball	7.5	1.0	6.0	5.6	12.1	17		

CA = Carrier IC = ICP RH = Rheem YK = York

Note 71 1.5" Stud Ext., Shaft End only, 104°F (40°C) Ambient, Double Flats

Note 72 Includes 4 Holes in Shell for Rheem Mount


† All marks shown within this document are properties of their respective owners



DRIVES
BRAKE MOTORS
GENERAL PURPOSE SINGLE PHASE
HVAC
WASHDOWN
AGRICULTURE
COMMERCIAL PUMP MOTORS
CLOSE COUPLED PUMP MOTORS
FIRE PUMP MOTORS
POOL & SPA MOTORS
RESIDENTIAL WATER PUMP
ELEVATOR AND GATE & DOOR

Permanent Split Capacitor Condenser Fan

5.6" Diameter, Totally Enclosed Air Over (TEAO)



HP	RPM	Volts	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wgt.	Notes	OEM
1/3	825/2	208-230	8675		Slv	7.5	2.0	6.0	5.4	11.9	17		
	1075	208-230	1861		Slv	7.5	2.1	5.0	4.6	10.1	14		
	1075	208-230	5455		Slv	5.0	2.0	3.7	4.1	8.3	13	72	RH
	1075	208-230	1877		Ball	7.5	2.1	5.0	4.6	10.1	14		
	1075	460	3737		Ball	7.5	1.3	6.0	5.4	11.9	17		
	1075/2	208-230	8670		Slv	7.5	2.2	6.0	4.8	11.4	16	71	
	1625	208-230	1891		Slv	5.0	1.9	5.0	4.6	10.1	13		
1/2	825	208-230	1870		Slv	12.5	2.8	6.0	6.4	12.4	20		
	825	460	1882		Ball	10.0	1.6	6.0	6.3	12.9	21		
	1075	208-230	1862		Slv	10.0	3.0	6.0	5.3	11.9	18		
	1075	208-230	1878		Ball	10.0	3.0	6.0	5.3	11.9	18		
	1075	460	3738		Ball	10.0	1.5	6.0	5.9	12.4	19		
	1075/2	208-230	8671		Slv	10.0	2.9	6.0	4.3	10.8	21	71	
	1625	208-230	1892		Slv	5.0	3.0	5.0	5.1	10.6	15		
3/4	1075	208-230	1868		Slv	10.0	4.5	5.0	5.8	10.3	20		
	1075	208-230	1879		Ball	10.0	4.7	5.0	5.8	11.4	21		
	1075	460	3742		Ball	10.0	2.0	6.0	6.4	12.9	22		

RH = Rheem

Note 71 1.5" Stud Ext., Shaft End only, 104°F (40°C) Ambient, Double Flats

Note 72 Includes 4 Holes in Shell for Rheem Mount

† All marks shown within this document are properties of their respective owners