


Split Phase Evaporative Cooler

6.3" Diameter, Open Dripproof

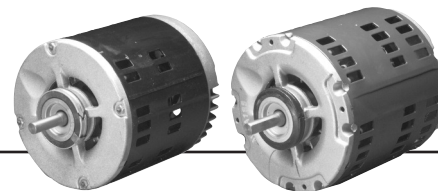


APPLICATIONS:

Designed to meet manufacturer's requirements for evaporative cooling units.

FEATURES:

- Re-Oilable Bearings
- Class B Insulation
- CW Rotation Shaft End
- Zinc-Phosphate Stator Studs And Nuts
- Corrosion Resistant Rotor Core And Actuator Assembly
- Industry Standard Hub To Hub Dimension
- Automatic Reset Thermal Overload Protector
- **Discount Symbol: DS-3HAC**



NOTE: For Hub Mounting, Order Kit Catalog #51 and #52. See Pages 172-173.

Single Speed

HP	RPM	Volts	Catalog Number	List	Bearings	NEMA Frame	Amps	Shaft N	Shaft U	Protector	Total C	SF	Ship Wgt.	Notes
1/3	1725	115	6764	\$164	Slv	56Z	6.6	1.6	.500	Auto	9.4	1	14	
1/2	1725	115	7095	\$180	Slv	56Z	7.9	1.6	.500	Auto	9.4	1	17	89
	1725	115	6768	\$155	Slv	56Z	8.2	1.6	.500	Auto	9.4	1	15	
	1725	230	6766	\$200	Slv	56Z	4.8	1.6	.500	Auto	9.4	1	19	
3/4	1725	115	7096	\$201	Slv	56Z	11.0	1.6	.500	Auto	9.4	1	19	89
	1725	115	6769	\$185	Slv	56Z	10.5	1.6	.500	Auto	9.4	1	18	
	1725	230	6771	\$241	Slv	56Z	5.4	1.6	.500	Auto	9.4	1	20	
1	1725	115/230	5149	\$367	Ball	56	15.1/7.5	1.9	.625	Auto	11.8	1	27	35, 60, 89, H39

Two Speed

HP	RPM	Volts	Catalog Number	List	Bearings	NEMA Frame	Amps	Shaft N	Shaft U	Protector	Total C	SF	Ship Wgt.	Notes
1/3	1725/1140	115	7097	\$192	Slv	56Z	6.4	1.6	.500	Auto	9.4	1	17	89
	1725/1140	115	6767	\$160	Slv	56Z	6.4	1.6	.500	Auto	9.4	1	17	
1/2	1725/1140	115	7098	\$200	Slv	56Z	8.2	1.6	.500	Auto	9.4	1	19	89
	1725/1140	115	6765	\$167	Slv	56Z	8.2	1.6	.500	Auto	9.4	1	16	
	1725/1140	230	6795	\$209	Slv	56Z	4.5	1.6	.500	Auto	9.4	1	19	
3/4	1725/1140	115	7099	\$231	Slv	56Z	10.9	1.6	.500	Auto	9.4	1	19	89
	1725/1140	115	6770	\$231	Slv	56Z	10.9	1.6	.500	Auto	9.4	1	19	
	1725/1140	230	6796	\$268	Slv	56Z	5.5	1.6	.500	Auto	9.4	1	19	
1	1725/1140	115	2574	\$360	Slv	56Z	13.6	1.9	.625	Auto	11.8	1	35	35, 60, 89, H39
	1725/1140	230	2423	\$359	Slv	56Z	7.2	1.9	.625	Auto	11.8	1	34	35, 60, 89, H39

Note 35 Includes resilient base
Note 60 Capacitor start

Note 89 All copper wound
Note H39 Reversible rotation by easy reconnection