

CONTACTOR, AC-3, 7.5KW/400V, 1NO+1NC, AC 24V 50/60HZ, 3-POLE, SZ S0 SCREW TERMINAL



|   |                           |
|---|---------------------------|
| Product brand name                                  | SIRIUS                    |
| Product designation                                 | Power contactor           |
| Product type designation                            | 3RT2                      |
| <b>General technical data</b>                       |                           |
| Size of contactor                                   | S0                        |
| Product extension                                   |                           |
| • function module for communication                 | No                        |
| • Auxiliary switch                                  | Yes                       |
| Insulation voltage                                  |                           |
| • rated value                                       | 690 V                     |
| Surge voltage resistance rated value                | 6 kV                      |
| maximum permissible voltage for safe isolation      |                           |
| • between coil and main contacts acc. to EN 60947-1 | 400 V                     |
| Protection class IP                                 |                           |
| • on the front                                      | IP20                      |
| • of the terminal                                   | IP20                      |
| Shock resistance at rectangular impulse             |                           |
| • at AC   | 7,5g / 5 ms, 4,7g / 10 ms |

|   |                            |
|---|----------------------------|
| <b>Shock resistance with sine pulse</b>   |                            |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 11,8g / 5 ms, 7,4g / 10 ms |
| <b>Mechanical service life (switching cycles)</b>   |                            |
| <ul style="list-style-type: none"> <li>• of contactor typical</li> </ul>  | 10 000 000                 |
| <ul style="list-style-type: none"> <li>• of the contactor with added electronics-compatible auxiliary switch block typical</li> </ul> | 5 000 000                  |
| <ul style="list-style-type: none"> <li>• of the contactor with added auxiliary switch block typical</li> </ul>                        | 10 000 000                 |
| <b>Equipment marking</b>  |                            |
| <ul style="list-style-type: none"> <li>• acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750</li> </ul>                 | K                          |
| <ul style="list-style-type: none"> <li>• acc. to DIN EN 61346-2</li> </ul>  | Q                          |

### Ambient conditions

|  |                |
|--|----------------|
| <b>Installation altitude at height above sea level</b>               |                |
| <ul style="list-style-type: none"> <li>• maximum</li> </ul>          | 2 000 m        |
| <b>Ambient temperature</b>   |                |
| <ul style="list-style-type: none"> <li>• during operation</li> </ul> | -25 ... +60 °C |
| <ul style="list-style-type: none"> <li>• during storage</li> </ul>   | -55 ... +80 °C |

### Main circuit

|   |                    |
|---|--------------------|
| <b>Number of poles for main current circuit</b>   | 3                  |
| <b>Number of NO contacts for main contacts</b>  | 3                  |
| <b>Operating voltage</b>  |                    |
| <ul style="list-style-type: none"> <li>• at AC-3 rated value maximum</li> </ul>   | 690 V              |
| <b>Operating current</b>  |                    |
| <ul style="list-style-type: none"> <li>• at AC-1 at 400 V <ul style="list-style-type: none"> <li>— at ambient temperature 40 °C rated value</li> </ul> </li> </ul>    | 40 A               |
| <ul style="list-style-type: none"> <li>• at AC-1 <ul style="list-style-type: none"> <li>— up to 690 V at ambient temperature 40 °C rated value</li> </ul> </li> </ul> | 40 A               |
| <ul style="list-style-type: none"> <li>— up to 690 V at ambient temperature 60 °C rated value</li> </ul>  | 35 A               |
| <ul style="list-style-type: none"> <li>• at AC-2 at 400 V rated value</li> </ul>  | 17 A               |
| <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul> </li> </ul>                                 | 17 A               |
| <ul style="list-style-type: none"> <li>— at 500 V rated value</li> </ul>  | 17 A               |
| <ul style="list-style-type: none"> <li>— at 690 V rated value</li> </ul>  | 13 A               |
| <b>Connectable conductor cross-section in main circuit at AC-1</b>  |                    |
| <ul style="list-style-type: none"> <li>• at 60 °C minimum permissible</li> </ul>  | 10 mm <sup>2</sup> |
| <ul style="list-style-type: none"> <li>• at 40 °C minimum permissible</li> </ul>  | 10 mm <sup>2</sup> |
| <b>Operating current for approx. 200000 operating cycles at AC-4</b>  |                    |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> </ul>  | 7.7 A                                    |
| <ul style="list-style-type: none"> <li>• at 690 V rated value</li> </ul>  | 7.7 A                                    |
| <b>Operating current</b>  |  |
| <ul style="list-style-type: none"> <li>• at 1 current path at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>                      | 35 A<br>4.5 A<br>1 A<br>0.4 A<br>0.25 A  |
| <ul style="list-style-type: none"> <li>• with 2 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>         | 35 A<br>35 A<br>5 A<br>1 A<br>0.8 A      |
| <ul style="list-style-type: none"> <li>• with 3 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>         | 35 A<br>35 A<br>35 A<br>2.9 A<br>1.4 A   |
| <b>Operating current</b>  |  |
| <ul style="list-style-type: none"> <li>• at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>              | 20 A<br>2.5 A<br>1 A<br>0.09 A<br>0.06 A |
| <ul style="list-style-type: none"> <li>• with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul> | 35 A<br>15 A<br>3 A<br>0.27 A<br>0.16 A  |
| <ul style="list-style-type: none"> <li>• with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul> | 35 A<br>35 A<br>10 A<br>0.6 A<br>0.6 A   |
| <b>Operating power</b>  |  |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• at AC-1 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 230 V at 60 °C rated value</li> <li>— at 400 V rated value</li> <li>— at 400 V at 60 °C rated value</li> <li>— at 690 V rated value</li> <li>— at 690 V at 60 °C rated value</li> </ul> </li> <li>• at AC-2 at 400 V rated value</li> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 13.3 kW<br>13.3 kW<br>23 kW<br>23 kW<br>40 kW<br>40 kW<br>7.5 kW<br>4 kW<br>7.5 kW<br>7.5 kW<br>11 kW |
| <b>Operating power for approx. 200000 operating cycles at AC-4</b>  |   |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> <li>• at 690 V rated value</li> </ul>  | 3.5 kW<br>6 kW  |
| <b>Thermal short-time current limited to 10 s</b>   | 150 A   |
| <b>Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor</b>   | 0.9 W   |
| <b>No-load switching frequency</b>  |   |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 5 000 1/h   |
| <b>Operating frequency</b>  |   |
| <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> <li>• at AC-2 maximum</li> <li>• at AC-3 maximum</li> <li>• at AC-4 maximum</li> </ul>  | 1 000 1/h<br>1 000 1/h<br>1 000 1/h<br>300 1/h  |
| <b>Control circuit/ Control</b>   |   |
| <b>Type of voltage of the control supply voltage</b>  | AC  |
| <b>Control supply voltage at AC</b>   |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>  | 24 V<br>24 V  |
| <b>Operating range factor control supply voltage rated value of magnet coil at AC</b>   |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>  | 0.8 ... 1.1<br>0.85 ... 1.1   |
| <b>Apparent pick-up power of magnet coil at AC</b>  |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>  | 68 V·A<br>67 V·A  |
| <b>Inductive power factor with closing power of the coil</b>  |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>  | 0.72<br>0.74  |

|  |                  |
|--|------------------|
| <b>Apparent holding power of magnet coil at AC</b>                           |                  |
| • at 50 Hz   | 7.9 V·A          |
| • at 60 Hz   | 6.5 V·A          |
| <b>Inductive power factor with the holding power of the coil</b>             |                  |
| • at 50 Hz   | 0.25             |
| • at 60 Hz   | 0.28             |
| <b>Closing delay</b>   |                  |
| • at AC  | 9 ... 38 ms      |
| <b>Opening delay</b>   |                  |
| • at AC  | 4 ... 16 ms      |
| <b>Arcing time</b>   | 10 ... 10 ms     |
| <b>Control version of the switch operating mechanism</b>                     | Standard A1 - A2 |
| <b>Residual current of the electronics for control with signal &lt;0&gt;</b> |                  |
| • at AC at 230 V maximum permissible   | 6 mA             |
| • at DC at 24 V maximum permissible  | 16 mA            |

#### Auxiliary circuit

|   |        |
|---|--------|
| <b>Number of NC contacts</b>              |        |
| • for auxiliary contacts                  |        |
| — instantaneous contact                   | 1      |
| <b>Number of NO contacts</b>              |        |
| • for auxiliary contacts                  |        |
| — instantaneous contact                   | 1      |
| <b>Operating current at AC-12 maximum</b> | 10 A   |
| <b>Operating current at AC-15</b>         |        |
| • at 230 V rated value                    | 10 A   |
| • at 400 V rated value                    | 3 A    |
| • at 500 V rated value                    | 2 A    |
| • at 690 V rated value                    | 1 A    |
| <b>Operating current at DC-12</b>         |        |
| • at 24 V rated value                     | 10 A   |
| • at 48 V rated value                     | 6 A    |
| • at 60 V rated value                     | 6 A    |
| • at 110 V rated value                    | 3 A    |
| • at 125 V rated value                    | 2 A    |
| • at 220 V rated value                    | 1 A    |
| • at 600 V rated value                    | 0.15 A |
| <b>Operating current at DC-13</b>         |        |
| • at 24 V rated value                     | 10 A   |
| • at 48 V rated value                     | 2 A    |
| • at 60 V rated value                     | 2 A    |

|  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul> | <p>1 A</p> <p>0.9 A</p> <p>0.3 A</p> <p>0.1 A</p> |
| <b>Contact reliability of auxiliary contacts</b>   | 1 faulty switching per 100 million (17 V, 1 mA)   |

### UL/CSA ratings

|   |   |
|---|---|
| <b>Full-load current (FLA) for three-phase AC motor</b>   |   |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>  | <p>14 A</p> <p>17 A</p>   |
| <b>Yielded mechanical performance [hp]</b>  |   |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for three-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul> | <p>1 hp</p> <p>3 hp</p> <p>3 hp</p> <p>5 hp</p> <p>10 hp</p> <p>15 hp</p> |
| <b>Contact rating of auxiliary contacts according to UL</b>   | A600 / Q600   |

### Short-circuit protection

|   |  |
|---|--|
| <b>Design of the fuse link</b>  |  |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul> | <p>gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 63 A</p> <p>gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A</p> <p>fuse gG: 10 A</p> |

### Installation/ mounting/ dimensions

|  |  |
|--|--|
| <b>Mounting position</b>   | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>Mounting type</b>   | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715   |
| <ul style="list-style-type: none"> <li>• Side-by-side mounting</li> </ul>  | Yes  |
| <b>Height</b>  | 85 mm  |
| <b>Width</b>   | 45 mm  |
| <b>Depth</b>   | 97 mm  |
| <b>Required spacing</b>  |  |
| <ul style="list-style-type: none"> <li>• for grounded parts <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul> | <p>6 mm</p> <p>6 mm</p>  |

## Connections/Terminals

|   |  |
|---|--|
| <b>Type of electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> </ul>  | <p>screw-type terminals</p> <p>screw-type terminals</p>  |
| <b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG conductors for main contacts</li> </ul> | <p>2x (1 ... 2.5 mm<sup>2</sup>), 2x (2.5 ... 10 mm<sup>2</sup>)</p> <p>2x (1 ... 2,5 mm<sup>2</sup>), 2x (2,5 ... 10 mm<sup>2</sup>)</p> <p>2x (1 ... 2.5 mm<sup>2</sup>), 2x (2.5 ... 6 mm<sup>2</sup>), 1x 10 mm<sup>2</sup></p> <p>2x (16 ... 12), 2x (14 ... 8)</p> |
| <b>Connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> </ul>  | <p>1 ... 10 mm<sup>2</sup></p> <p>1 ... 10 mm<sup>2</sup></p>  |
| <b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG conductors for auxiliary contacts</li> </ul>        | <p>2x (0,5 ... 1,5 mm<sup>2</sup>), 2x (0,75 ... 2,5 mm<sup>2</sup>)</p> <p>2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)</p> <p>2x (20 ... 16), 2x (18 ... 14)</p>  |

## Safety related data

|   |                         |
|---|-------------------------|
| <b>B10 value</b> <ul style="list-style-type: none"> <li>• with high demand rate acc. to SN 31920</li> </ul>   | <p>1 000 000</p>        |
| <b>Proportion of dangerous failures</b> <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> <li>• with high demand rate acc. to SN 31920</li> </ul> | <p>40 %</p> <p>73 %</p> |
| <b>Failure rate [FIT]</b> <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> </ul>   | <p>100 FIT</p>          |
| <b>Product function</b> <ul style="list-style-type: none"> <li>• Mirror contact acc. to IEC 60947-4-1</li> </ul>  | <p>Yes</p>              |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b>   | <p>20 y</p>             |
| <b>Protection against electrical shock</b>  | <p>finger-safe</p>      |

## Certificates/approvals

|                          |     |
|--------------------------|-----|
| General Product Approval | EMC |
|--------------------------|-----|



[KC](#)



|                                       |                           |                   |                   |
|---------------------------------------|---------------------------|-------------------|-------------------|
| Functional Safety/Safety of Machinery | Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------------------|---------------------------|-------------------|-------------------|

[Type Examination](#)



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



|                   |
|-------------------|
| Marine / Shipping |
|-------------------|



|       |
|-------|
| other |
|-------|

[Confirmation](#)



|                     |
|---------------------|
| Further information |
|---------------------|

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2025-1AC20>

**Cax online generator**




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2025-1AC20>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/ww/en/ps/3RT2025-1AC20>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2025-1AC20&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2025-1AC20&lang=en)

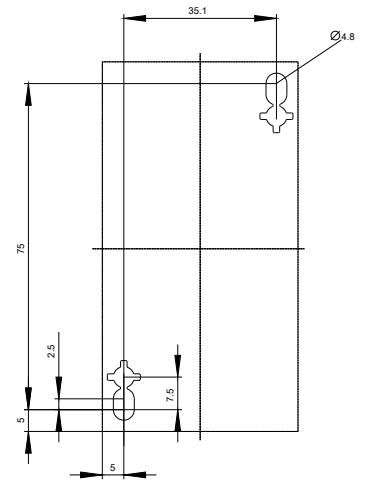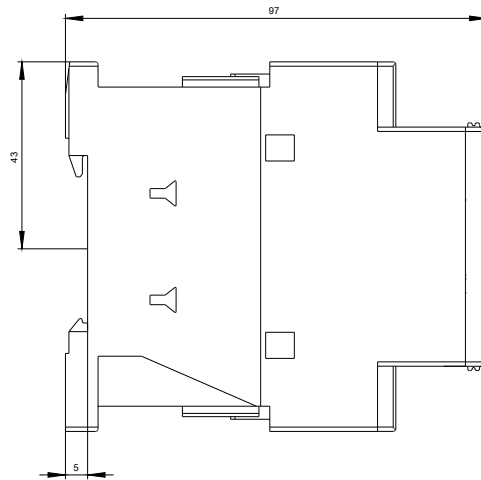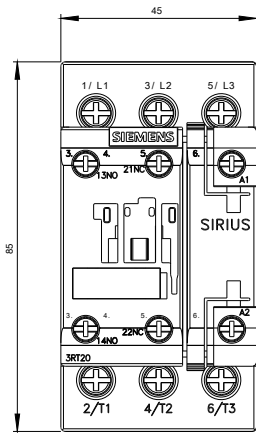

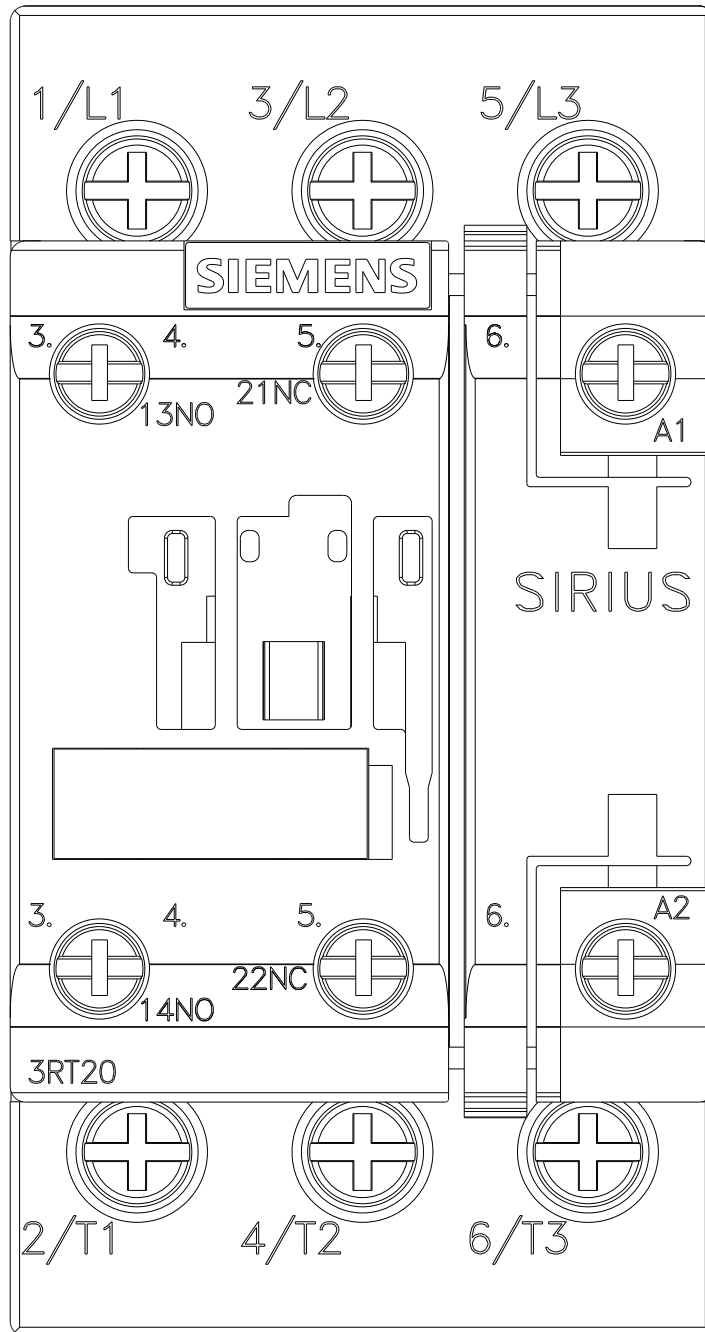

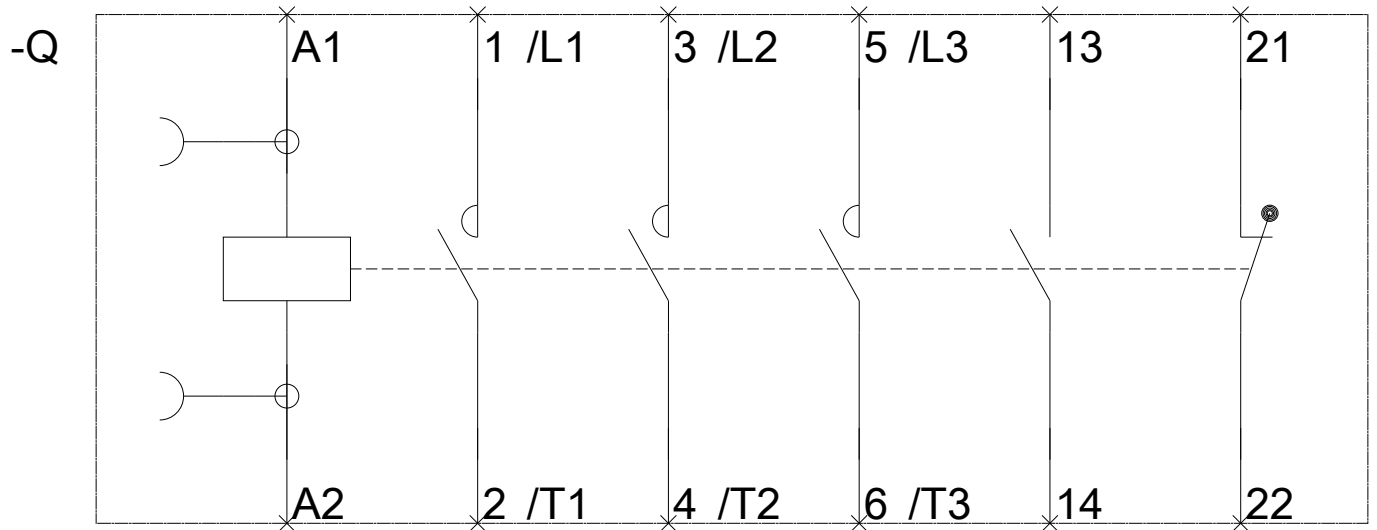

last modified:

11/26/2017