


RELIEF AND REDUCING VALVES

SUBMITTAL

JOB: _____	REPRESENTATIVE: _____
_____	_____
_____	QUOTATION REFERENCE: _____
ENGINEER: _____	ORDER NO: _____ DATE: _____
CONTRACTOR: _____	SUBMITTED BY: _____ DATE: _____
	APPROVED BY: _____ DATE: _____

COMBINATION UNITS

Note: Reducing Valve factory set at 12 psi, adjustable 7 to 25 psi.
Reducing Valve equipped with strainer, anti-syphon check, composition disc and brass valve seat.



Model No.	Size	Relief Setting	Body	Approx. Shipping Wt.	Face to Face DIM.	No. Req'd.
C-11	1/2"	30 PSI	BRASS	2 1/2 Lbs.	7-7/8"	

††




RELIEF VALVES

Model No.	Size	Relief Setting	Body	Approx. Shipping Wt.	Face to Face DIM.	No. Req'd.
RL-11	1/2"	30 PSI	BRASS	1 1/4 Lbs.	2-1/2"	

REDUCING VALVES

Note: RD-11 Reducing Valve same as used in C-11 Combination Unit.
Units complete with strainer and anti-syphon check.

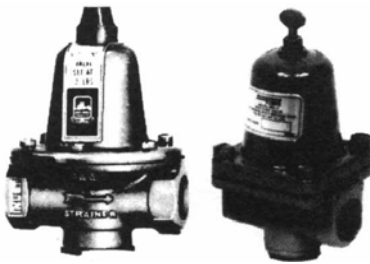

Typical
RD-40
RD-50
HRD-70

Typical
RD-11

REDUCING VALVES

Model No.	Size	Standard Del. Setting	Body	Approx. Shipping Wt.	Face to Face	No. Req'd
RD-11T/S	1/2"	12 PSI *	BRASS	1 1/4 Lbs.	4-1/8"	
RD-40	3/4"	12 PSI *	BRASS	3 1/4 Lbs.	3-9/16"	
RD-50	3/4"	12 PSI *	IRON	3 1/4 Lbs.	3-9/16"	
HRD-70	3/4"	45 PSI †	BRASS	3 1/4 Lbs.	3-9/16"	

* Adjustable 7 PSI to 25 PSI.

† Adjustable 25 PSI to 125 PSI. Maximum Initial Pressure 150 PSI.

†† With Fast Fill Feature.

S. A. Armstrong Limited
23 Bertrand Avenue
Toronto, Ontario
Canada, M1L 2P3
T: (416) 755-2291
F (Main): (416) 759-9101

Armstrong Pumps Inc.
93 East Avenue
North Tonawanda, New York
U.S.A. 14120-6594
T: (716) 693-8813
F: (716) 693-8970

Armstrong Holden Brooke Pullen
Wenlock Way
Manchester
United Kingdom, M12 5JL
T: +44 (0) 161 223 2223
F: +44 (0) 161 220 9660



© S.A. Armstrong Limited 1994