


RANCO ROOM AIR CONDITIONER CONTROLS

C12/C21 SINGLE STAGE CONTROL

These controls replace many OEM controls on single stage packaged terminal, room, and thru-the-wall heat/cool units.

ELECTRICAL RATING

RATING	125V	240V	277V
FULL LOAD AMPS	20	20	16
LOCKED ROTOR AMPS	80	80	60
PILOT DUTY (VA)	240	240	240
RESISTIVE LOADS AMPS	25	-	16

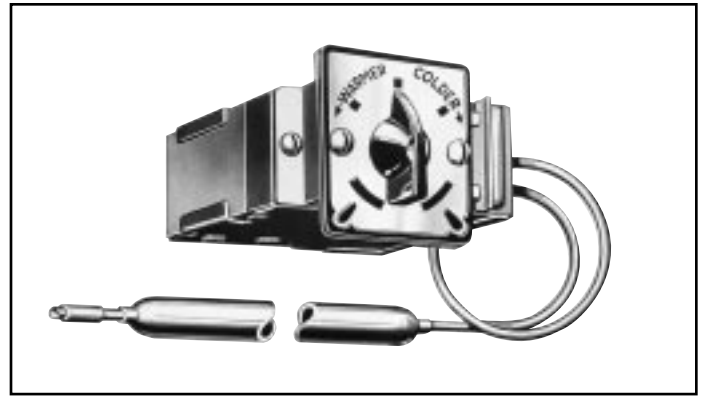

ORDERING DATA


UNI-LINE ORDER NO.	SWITCH	TEMPERATURE RANGE (°F)	DIFFERENTIAL (°F)	SENSING ELEMENT	REPLACES
C12-5010	SPDT	60 TO 98	3	36" CAPILLARY WITH 3/8 X 9" BULB	YORK #026-17371-00 HEIL QUAKER 40889-001 SIGNER/MCQUAY 02005451 SNYDER GENERAL 02005610 G.E. 21B20162-P04 WP28X30
C12-9025		60 TO 93		26" CAPILLARY WITH 3/8 X 7" BULB	
C12-9018		60 TO 89		21" CAPILLARY WITH 31/64" X 5-1/2" BULB	
C21-2014		54 TO 90	4		

C12/C17/C22 ENERGY CONSERVATION CONTROLS

Helps prevent wide variations in room temperature by sensing discharge and return air temperature, and limiting heat/cool to a narrow range. Helps to conserve energy and lower operating costs. Each section of capillary is 36" long.

ELECTRICAL RATING

RATING	C12-9024				C17-9043			
	24V	120V	240V	277V	120V	240V	250V	277V
AC FULL LOAD AMPS		20	20	16	20	20	-	16
AC LOCKED ROTOR AMPS		80	80	60	80	80	-	60
PILOT DUTY (VAC)		240	240	240	240	240	-	240
RESISTIVE LOADS AMPS		25	-	16	-	-	25	16

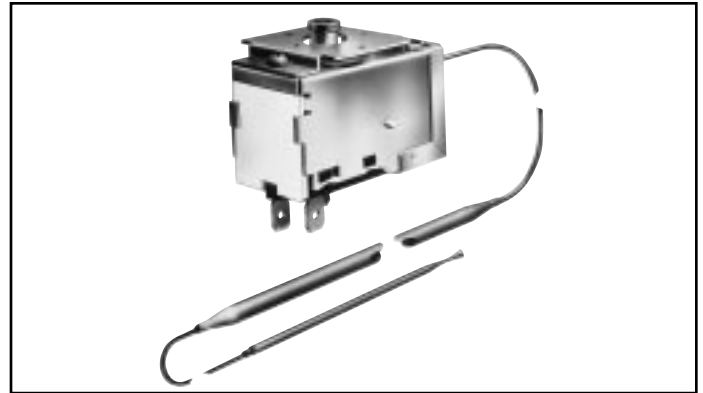

ORDERING DATA

UNI-LINE ORDER NO.	DIAL SHAFT	SWITCH	TEMPERATURE RANGE (°F)	DIFFERENTIAL	CAPILLARY	REPLACES
C12-2043	1"	SPDT	58 TO 89	4	30" + BULB & 20" + BULB	C12-2030/HH22UCO72A
C12-9024	ADAPTABLE		67 TO 83		36" + BULB & 36" + BULB	
C17-2033	1"	2 SPDT	62 TO 86 (COOLING) 55 TO 82 (HEATING)		28" + BULB & 20" + BULB	C17-2028/HH22UK058A
C17-9043	ADAPTABLE		68 TO 86 (COOLING)		36" + BULB & 36" + BULB	
C22-2503	5/16"		68 TO 86 (COOLING) 59 TO 77 (HEATING)		21" + BULB & 15" + BULB	21C50842P01/21C55082P02