

SERIES 17000, 18000



THERMOSWITCH®

Temperature Controllers

FEATURES

- Fast response
- Close control
- Extreme sensitivity
- Vibration resistance
- Adjustable
- Narrow Differential
- No Power Supply Required
- Brass or Stainless Steel Shell

APPLICATIONS

- Hydraulic Laminating Presses
- Livestock Watering Fountains
- Label Adhesive Applications
- Paint Drying Equipment
- Hot Stamp Printers
- Deep Fat Fryers
- Textile Platens

DESCRIPTION

THERMOSWITCH® controllers control temperatures as low as -100°F (-73°C) and as high as 600°F (316°C) with the proven dependability of over 75 years of service to satisfied customers.

PRINCIPLE OF OPERATION

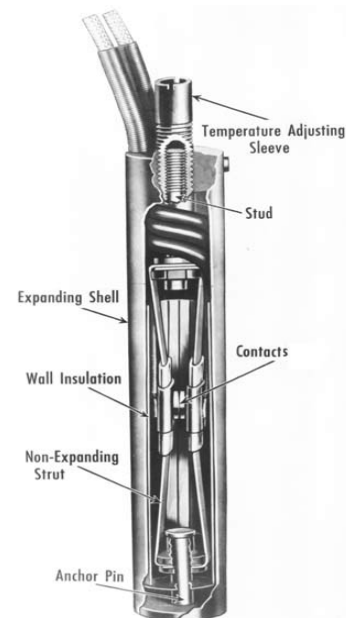
The THERMOSWITCH® controller is a strut-and-tube type thermostat comprised of two basic parts: the outer shell, made of high-expanding metal and the strut assembly, made of low-expanding metal.

A pair of electrical contacts is mounted on the strut assembly and installed in the shell under tension or compression.

Since each end of the strut assembly is mechanically connected to the ends of the shell, a net change of force is produced on the strut assembly as the shell expands or contracts with changing temperature. The temperature at which the contacts “make” or “break” can be regulated by a temperature adjusting sleeve.


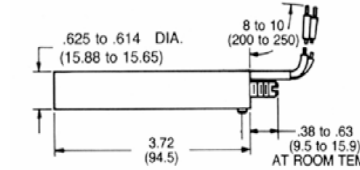

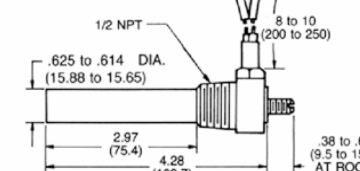

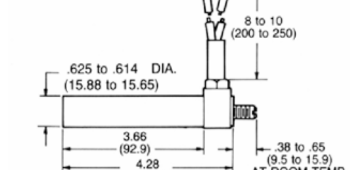

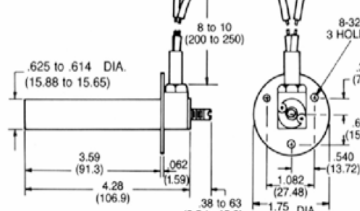

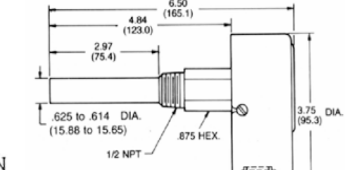

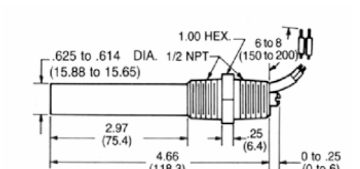
This adaptation of the differential-expansion principle gives several important control advantages:





- **Fast Response** - Since the outer shell of the THERMOSWITCH® is the active sensing member, and not merely a housing, response to temperature change is almost instantaneous.



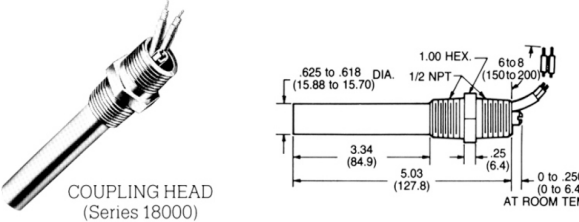

- **Close Control** - The controller's shell and strut arrangement has “anticipation” characteristics which substantially reduce the amount of overshoot and undershoot during conditions of rapid temperature change. Anticipation is produced by an inherent time lag between the shell and struts, which causes the shell to “lead” the struts by an interval that varies with the rate of temperature change. With rapid temperature rise, the shell exerts a larger net force on the struts and tends to pull them apart sooner than if the temperature were rising slowly. The result is several degrees or more of anticipation which helps produce closer control.
- **Extreme Sensitivity** - The strut and contact operates by slow make and break. This means that every temperature change, no matter how small, causes a corresponding change in the space between the electrical contacts. Therefore, contact action can be produced by a very small temperature change, which accounts for the THERMOSWITCH® controller's excellent resolution sensitivity of 0.1°F (0.05°C).
- **Vibration Resistance** - Since the strut assembly is assembled under tension or compression, a properly installed unit has excellent vibration resistance and will provide the best possible control under difficult physical conditions.
- **Agency Approved** - Various models are listed Underwriters Laboratories (UL) and certified by the Canadian Standards Association (CSA) and compliance with applicable European norms for acceptance the EU under the CE marking scheme. Contact manufacturer for specific approval details.

THERMOSWITCH® CONTROLLERS -100 TO 600°F/-73 TO 316°C

Thermoswitch Unit Type and Dimensions (Inches/mm)	Description	Catalog Number	Temperature Range	Contact Operation on Temp Rise	Shell and Head Material	Approximate Degrees changes per full turn of adjusting sleeve	Extreme Temperature Exposure	Current Rating	Factory Temp Setting Tolerance (MOD. #3)	Applicable Modifications	Applicable Special Features											
										See Modifications and Special Features Section												
 <p>CARTRIDGE (Series 17000)</p> 	The basic element of all THERMOSWITCH® controllers. Has all the desirable features of the ideal thermostat - high sensitivity, wide adjustment range, small size, rugged construction, vibration resistance, and low cost. The unit can be inserted into a .625 in. (15.88 mm) reamed hole. Approximate weight is 2.5 ounces (70 grams).	01-017000-000	-100 to +400°F -73 to +204°C	Opens	Brass	90°F/50°C	Unless otherwise specified, all ratings apply to non-inductive loads such as heaters or resistors. Tungsten filament lamps have an in rush 10 to 15 times the steady state current. Do not exceed ratings.		1 2 3 4 14	31 34 35												
		01-017021-000		Closes		80°F/45°C																
		01-017002-000	-100 to +600°F -73 to +316°C	Opens	300 Series S.S. Shell	110°F/60°C																
		01-017023-000		Closes		100°F/55°C																
 <p>HEX HEAD (Series 17100)</p> 	Has all the features of the Cartridge Type plus the addition of a pipe thread for mounting. Approximate weight is 5 ounces (140 grams).	01-017100-000	-100 to +400°F -73 to +204°C	Opens	Brass	80°F/45°C	UNITS THAT OPEN ON TEMPERATURE RISE: 100°F/73°C indefinitely and 100°F/55°C above set point for one hour maximum UNITS THAT CLOSE ON TEMPERATURE RISE: -100° to +400°F/-73° to 204°C indefinitely and 500°F/260°C for one hour maximum -100° to +600°F/-73° to +316°C indefinitely and 700°F/370°C for one hour maximum	* AC 10 amps 120 volts 5 amps 240 volts (non-inductive) DC ratings consult Fenwal	UNITS THAT OPEN ON TEMPERATURE RISE ±5°F from +32 to +100°F ±3°F or ±2% of Setting Value (whichever is greater) From 100 to 600°F UNITS THAT CLOSE ON TEMPERATURE RISE ±5°F or 3% of Setting Value (whichever is greater)	1 thru 14	31 34 35											
		01-017121-000		Closes		75°F/40°C																
		01-017102-000	-100 to +600°F -73 to +316°C	Opens	300 Series S.S. Shell Brass Head	100°F/55°C																
		01-017123-000		Closes		90°F/50°C																
 <p>BLOCK HEAD (Series 17200)</p> 	This unit has the same mounting as the Cartridge Type but is designed so modifications may be included. It also can be inserted into a .625 in. (15.88 mm) reamed hole. Approximate weight is 3 ounces (84 grams).	01-017200-000	-100 to +400°F -73 to +204°C	Opens	Brass	80°F/45°C			1 thru 14	31 34												
		01-017221-000		Closes		75°F/40°C																
		01-017202-000	-100 to +600°F -73 to +316°C	Opens	300 Series S.S. Shell Brass Head	100°F/55°C																
		01-017223-000		Closes		90°F/50°C																
 <p>FLANGE HEAD (Series 17300)</p> 	Has all the features of the Block Head Type except a mounting flange has been provided. Approximate weight is 4 ounces (112 grams).	01-017300-000	-100 to +400°F -73 to +204°C	Opens	Brass	80°F/45°C			1 thru 14	31 34												
		01-017321-000		Closes		70°F/40°C																
		01-017302-000	-100 to +600°F -73 to +316°C	Opens	300 Series S.S. Shell	100°F/55°C																
		01-017323-000		Closes		90°F/50°C																
 <p>JUNCTION BOX IMMERSION (Series 17800)</p> 	Has electric conduit junction box containing terminal block and temperature adjusting dial and knob. Extended hexagonal section with pipe thread permits easy mounting into tapped hole of boss, immersing shell into fluid medium to be controlled.	01-017800-000	-100 to +400°F -73 to +204°C	Opens	Brass	125°F/70°C	TEMPERATURE OFFSET VALUES DUE TO PRESSURE (APPROX. ONLY) <table border="1"> <thead> <tr> <th>Pressure PSI</th> <th>Set Point Offset</th> </tr> </thead> <tbody> <tr> <td>100</td> <td>+3°F/2°C</td> </tr> <tr> <td>200</td> <td>+6°F/3°C</td> </tr> <tr> <td>300</td> <td>+9°F/5°C</td> </tr> <tr> <td>400</td> <td>+12°F/7°C</td> </tr> <tr> <td>500</td> <td>+15°F/8°C</td> </tr> </tbody> </table>	Pressure PSI	Set Point Offset	100	+3°F/2°C	200	+6°F/3°C	300	+9°F/5°C	400	+12°F/7°C	500	+15°F/8°C		1 3	31 34
		Pressure PSI	Set Point Offset																			
		100	+3°F/2°C																			
		200	+6°F/3°C																			
300	+9°F/5°C																					
400	+12°F/7°C																					
500	+15°F/8°C																					
01-017821-000		Closes	75°F/40°C																			
01-017802-000	-100 to +600°F -73 to +316°C	Opens	300 Series S.S. Shell Brass Head	160°F/90°C																		
01-017823-000		Closes		90°F/50°C																		
 <p>COUPLING HEAD (Series 18000)</p> 	The Coupling Head Type has a hexagonal mounting section with pipe threads at each end. This unit may be directly attached to electrical conduit. Approximate weight is 5 ounces (140 grams).	01-018000-000	-100 to +400°F -73 to +204°C	Opens	Brass	80°F/45°C	Collapsing pressure (brass shell) 1400 psi at room temperature Collapsing pressure (S.S. shell) 3,500 psi at room temperature		1 2 3 4 14	31 34 35												
		01-018021-000		Closes		75°F/40°C																
		01-018002-000	-100 to 600°F -73 to +316°C	Opens	300 Series S.S. Shell Brass Head	100°F/55°C																
		01-018023-000		Closes		90°F/50°C																

 Recognized under the Components Program of Underwriters Laboratories, Inc. (XAPX2)
 Underwriters Laboratories Listed (XAPX)
 Certified by Canadian Standards Association (Class 481302) CSA File No. LR7378
 * UL and CSA units rated for AC operation only.

CORROSION RESISTANT Controller -100 to 600°F/-93 to 316°C

Thermoswitch Unit Type and Dimensions (Inches/mm)	Description	Catalog Number	Temperature Range	Contact Operation on Temp Rise	Shell and Head Material	Approximate Degrees changes per full turn of adjusting sleeve	Extreme Temperature Exposure	Current Rating	Factory Temp Setting Tolerance (MOD. #3)	Applicable Modifications	Applicable Special Features
										See Modifications and Special Features Section	
	<p>This model has a hexagonal mounting section with male pipe threads at each end. This unit may be directly attached to electrical conduits or explosion proof fittings. It is ideally suited for photo processing, laboratory and experimental test work, food processing, bleaching & dyeing, and many other similar applications. Approximate weight is 5 ounces (140 grams).</p>	01-180020-029 	-100 to +500°F -73 to 260°C	Opens	All Type 316 S.S.	100°F/ 55°C	-100°F/-73°C indefinitely and 100°F/55°C above set point for 1 hour maximum	AC 10 amps 120 volts 5 amps 240 volts	±5°F from -100 to 100°F ±3F or 2% of setting value (whichever is greater) from 100 to 600F	1 2 3 4 14 SPECIAL Feature 31	
		01-018002-021									
		01-018023-007	-100 to +600°F -73 to +316°C	Closes							-100°F/-73°C indefinitely and 700°F/370°C for 1 hour maximum

APPLICATION HINTS - Contact Protection

Capacitors are not needed under average conditions. For smoother control of small loads (below 1/10th the controller rating or to prevent contact bounce due to vibration) use capacitance in µF of 0.28 divided by line voltage.

Note: Capacitors should be rated a minimum of 600 volts for 120 volt circuits and a minimum of 1000 volts for 240 volt circuit.

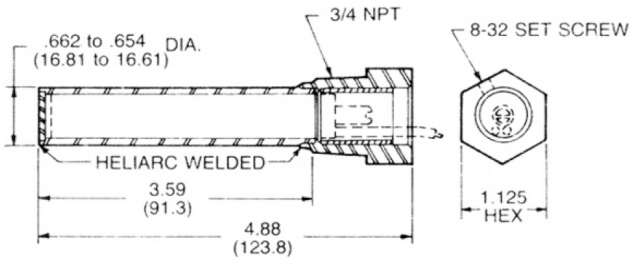
Voltage	Service	Capacitance (µF)
120 VAC	Resistance	None Required
240 VAC	Resistance	0.1
120 or 240 VAC	Relays	0.001 to 0.01
15 to 25 VAC	Relays	0.02
120 or 240 VAC	Motors	Use Relay

RATINGS

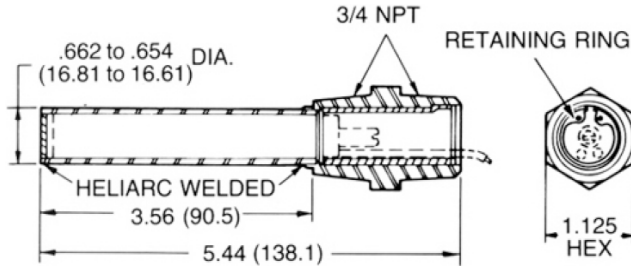
Unless otherwise specified, all rating apply to non-inductive loads, such as heaters or resistors. Tungsten filament lamps have an inrush of 10 to 15 times the stead state current. Do not exceed switch rating at any time.

PROTECTIVE WELLS

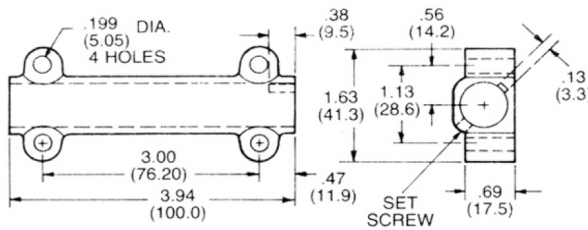
For use with 170XX 5/8" Diameter Cartridge THERMOSWITCH® Controllers



Catalog No. 34-011201-000
Hex Head Well
(321 Stainless Steel Well & Head)
Applicable Modifications
 1 Special Marking
Applicable Special Features
 31A Extended Shell
 Approximate weight is 4 ounces (112 grams)
 Pressure Ratings: 100 psi at -100°F to +250°F
 60 psi at 600°F

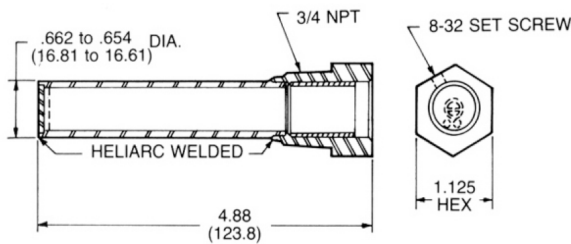


Catalog No. 34-011204-000
Coupling Head Well
(321 Stainless Steel Well & Head)
Applicable Modifications
 1 Special Marking
Applicable Special Features
 31A Extended Shell
 Approximate weight is 5 ounces (140 grams)
 Pressure Ratings: 100 psi at -100°F to +250°F
 60 psi at 600°F



Catalog No. 34-011100-002
Aluminum Surface Mount Well
 Approximate weight is 4 ounces (112 grams)
 Pressure Ratings: 100 psi at -100°F to +250°F
 60 psi at 600°F

For use with 172XX and 173XX THERMOSWITCH® Controllers



Catalog No. 34-011208-000
Low Pressure Hex Head Well
(321 Stainless Steel Well & Head)
Applicable Modifications
 Special Marking
Applicable Special Features
 31A Extended Shell
 Approximate weight is 4 ounces (112 grams)
 Pressure Ratings: 100 psi at -100°F to 250°F
 60 psi at 600°F

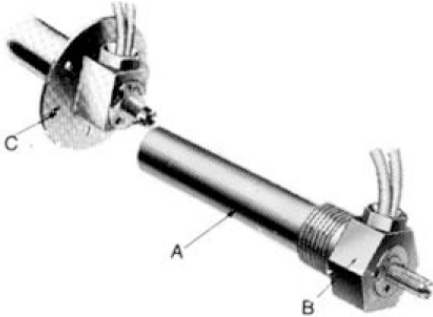
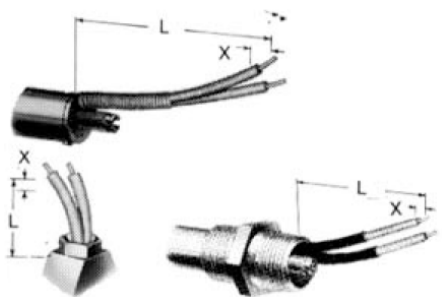
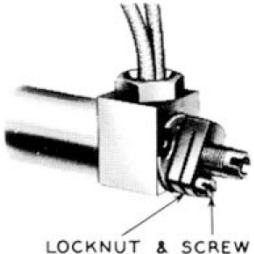
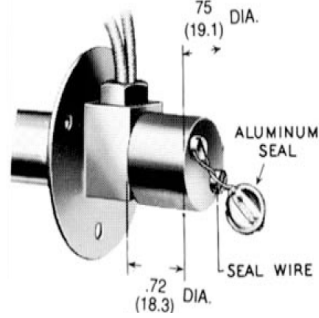
In many applications involving liquid and gases, the use of a well is recommended. When the removal of a hex or coupling head THERMOSWITCH® controller would require draining of the container in which it is inserted, the use of a well assembly permits removal of the controller at any time without other disturbances. When surrounding ambients are subject to extreme changes thus affecting THERMOSWITCH® control, the well makes it possible to insert the THERMOSWITCH® controller completely into the medium being controlled thereby eliminating these ambient temperature effects or "head effect".

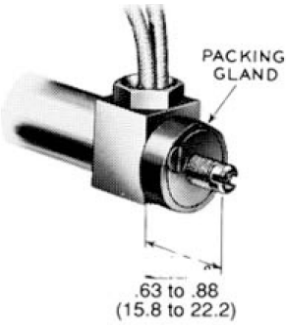
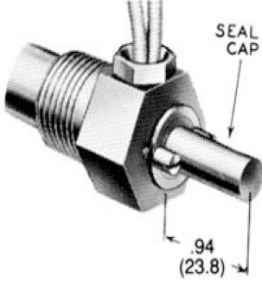
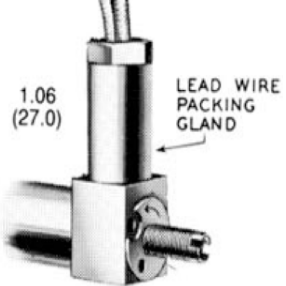
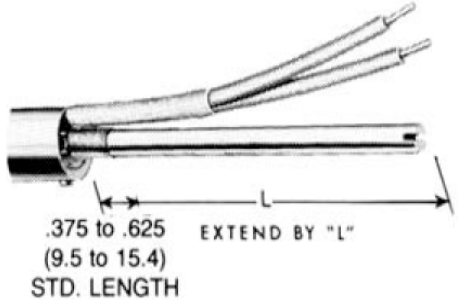
A well offers protection in applications where fluids have a corrosive effect on the brass shell of the THERMOSWITCH® controller.

Note: Certain gases or liquids (including water at elevated temperatures) could be corrosive and/or cause electrolytic action, which could severely shorten the life of the controller. Where corrosion or electrolysis is suspect, the use of stainless steel heliarc welded thermowells or various platings or coatings may increase controller life. The rate of corrosion or electrolysis is influenced by a great many system parameters such as chemical makeup and temperature of the solution, stray electric currents, etc. Consult the supplier of your chemicals or Fenwal for suggestions.

In addition, use a well to protect the THERMOSWITCH® controller from external forces or blows which could affect its operation.

MODIFICATIONS

<p>(1) Special Marking 01-990010-XXX Special marking may be rubber stamped in indelible ink at points A, B, or C. Amount of marking is limited to the space available. Specify test and location of marking.</p>	
<p>(2) Extended Lead Wires 01-9902X-XXX Lead wires may be extended to any length. Wire lengths are specified at that portion of lead wire outside of the THERMOSWITCH® controller, indicated by dimensions "L". Special lead wire stripping may also be obtained by specifying length shown as dimension "X".</p>	
<p>(3) Factory Temperature Setting 01-990030-00X The controller may be preset at Fenwal to any temperature within its listed range to a minimum of 32°F (0°C). Unless this modification is specified, units are preset at approximately 75°F (25°C). Modification 4 is recommended when ordering a factory set unit to preclude a possible shift in set point do to mishandling.</p>	
<p>(4) Temperature Restraining Device 01-990040-000 A restraining device may be added to secure the temperature adjustment sleeve after calibration. This modification deters tampering with the setting. It also minimizes the possibility of a shift in calibration due to vibration.</p>	 <p style="text-align: center;">LOCKNUT & SCREW</p>
<p>(5) Tamper-proof Cap 01-990050-000 A tamper-proof cap can be furnished to prevent tampering with a THERMOSWITCH® controller equipped with Modification 4 above.</p>	

<p>(8) Moisture Resistant Seal</p> <p>01-990080-001 (8A) Under certain conditions where there is excessive moisture or vapor, a moisture resistant seal may be added to protect the interior of the THERMOSWITCH® controller. Modification 13 should be ordered with this modification.</p> <p>01-990080-002 (8B) A same as 8A above except seal is four hold type so dial and knob may be used. Modification 13 should be ordered with this modification.</p>	 <p>PACKING GLAND</p> <p>.63 to .88 (15.8 to 22.2)</p>
<p>(10) Moisture Resistant Tamper-proof Cap</p> <p>01-99011X-XXX</p> <p>To seal a controller against moisture and tampering, a moisture resistant, tamper-proof cap may be mounted over the adjusting sleeve. It may be used with unset or factory preset units.</p>	 <p>SEAL CAP</p> <p>.94 (23.8)</p>
<p>(13) Packing Gland and Lead Wires</p> <p>01-990130-00X</p> <p>In installations where moisture may enter THERMOSWITCH® controller around lead wires, a packing gland is recommended. Modification 8 should be used with this modification.</p>	 <p>1.06 (27.0)</p> <p>LEAD WIRE PACKING GLAND</p>
<p>(14) Extended Temperature Adjusting Sleeve</p> <p>01-990140-XXX</p> <p>Adjustment sleeve extensions are available only in multiples of one inch. Why ordering, the length specified is the "extended by" length "L". For example, if the standard adjusting sleeve length for the controller ordered is 3/8 to 5/8 inch, and a 4 inch extension is ordered, the overall length will be 4-3/8 to 4-5/8 inches. Minimum ordering quantities apply.</p>	 <p>.375 to .625 (9.5 to 15.4) STD. LENGTH</p> <p>EXTEND BY "L"</p>

SPECIAL FEATURES

When special features are specified, THERMOSWITCH[®] controllers are assigned a special catalog number. As a result, THERMOSWITCH[®] controllers as received may bear a different catalog number than the one specified on the customer order.

31 Extended Shell - THERMOSWITCH[®] Controllers

In applications where a standard THERMOSWITCH[®] controller is too short to reach the medium to be controlled, the shell length may be extended. Extension must be ordered in increments of 1 inch beyond standard length.

31A Extended Shell - Protective Wells

Wells may be extended in increments of one inch. The THERMOSWITCH[®] controller must also be extended equally in length.

34 Plating Of All Exposed Brass Parts

To overcome certain corrosive conditions, all exposed brass parts may be plated with nickel.

35 Polyvinyl Chloride (PVC) Lead Wires

PVC insulated wire can be supplied as a moisture-resistant lead wire for those applications where the operating temperature does not exceed 175°F (80°C).

HOW TO ORDER

1. Select controller and/or protective well detailed on Pages 2-4.
2. Order using catalog number.
3. Select applicable Modifications and/or Special Features detailed on Page 5 and order using 11 digit number shown.

In applications where a standard THERMOSWITCH[®] controller is too short to reach the medium to be controlled, the shell length may be extended. Extension must be ordered in increments of 1 inch beyond standard length.



Operation outside specifications could result in failure of the Fenwal product and other equipment with injury to people and property.

Specifications subject to change without notice.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or have a particular problem or question, contact KIDDE-FENWAL, INC.

**FENWAL
CONTROLS**

F-01-020 Rev AA

©2014 Kidde-Fenwal, Inc.

Fenwal Controls, Kidde-Fenwal Inc.
United Technologies Climate | Controls | Security
400 Main Street
Ashland, MA 01721
Tel: 800-FENWAL-1 Fax: 508-881-7619
www.fenwalcontrols.com