



Model - HGP-H


The design and function of the new high pressure gas switches are based on the same principles of reliability, repeatability and accuracy that has made Antunes Controls existing line of pressure switches so successful. The high pressure gas switch monitors gas pressure and breaks the electrical control circuit when pressure drops below or rises above the desired pre-set point.

Features:

- Mount Horizontally - Does Not Require Accurate Leveling
- Available in Automatic Recycle or Manual Reset
- Easily visible On-Off Indicator
- 1-15 PSI Adjustable Range and Thirty-five PSI Maximum Surge Pressure
- Rugged Die Cast Aluminum Construction



Dimensions:

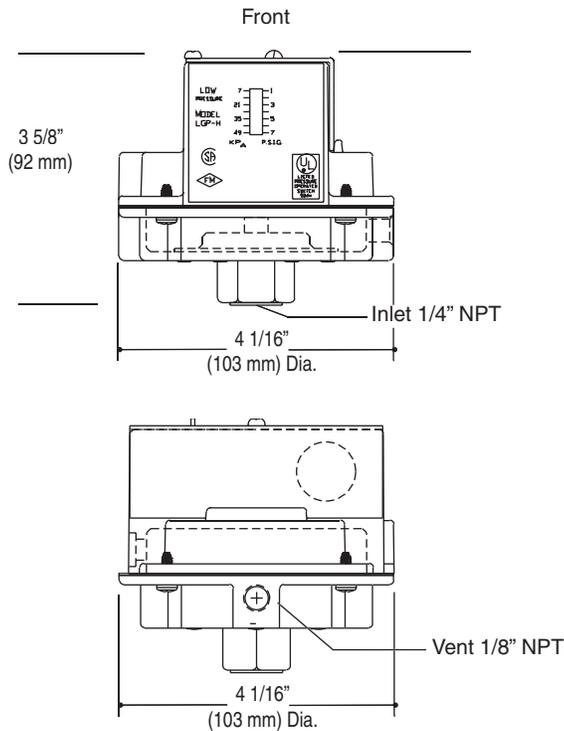


Electrical:

Ratings - All Models
 10A, 1/8 HP, 125VAC
 5A, 1/4 HP, 250 VAC
 Pilot Duty: 125 Va, 125-250 VAC

All Models:

Max. surge pressure 35 P.S.I. Max. ambient temperature 140°F, 60°C. Min. Ambient temperature -40°F, -40°C.

Mounting Bracket:

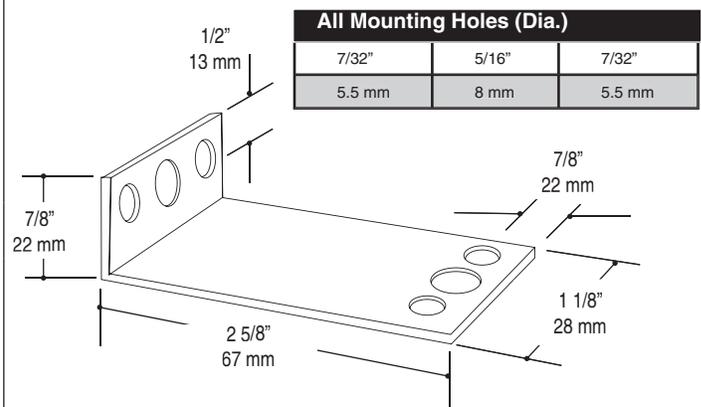

Options:

Panel Mount: Specify "Mounting Bracket" on order
Dust Proof: Specify "Dust Proof" on order.

Models	Ranges		Natural or L.P. Gas	Automatic or Manual Reset	Field Adjustable
	P.S.I.	Bar			
HGP - H	1-7	.06 - .48	Yes	Manual	Yes
	6-15	.41 - 1.03	Yes	Manual	Yes
RHGP-H	1-7	.06 - .48	Yes	Automatic	Yes
	6-15	.41 - 1.03	Yes	Automatic	Yes
LGP-H	1-7	.06 - .48	Yes	Manual	Yes
	6-15	.41 - 1.03	Yes	Manual	Yes
RLGP - H	1-7	.06 - .48	Yes	Automatic	Yes
	6-15	.41 - 1.03	Yes	Automatic	Yes

Limitation of Liability. If it is understood and agreed that seller's liability whether in contract, in tort, under any warranty, in negligence or otherwise, shall not exceed the return of the amount of the purchase price paid by purchaser and under no circumstances shall seller be liable for special, indirect or consequential damages. The price stated for the equipment is a consideration in limiting seller's liability. No action, regardless of form, arising out of the transactions may be brought by purchaser more than one year after the cause of action has accrued.