

VAC

Valve Accessories & Controls

V200 Series Positioners

In a single compact and rugged housing

The V200 positioner incorporates the flexibility of converting from a pneumatic unit to several versions of an electropneumatic unit, and the ability to add position feedback, in a matter of minutes, all in **one compact and rugged housing**. Maximum flexibility and versatility!!

With a rugged Nema 4X, IP 66, die cast aluminum housing, versatile polyester coating, and standard features like external zero and span adjustment, this unit expands the VAC offering to cover this “**all in one**” market for positioners. Add to this the excellent performance yet simple design, and the combination equals a real value.

A product that offers it “all”and all in **one compact, simple, housing!!**



The V200



Dome Indicator -
Black/Yellow, Red/Green



Internal 4/20 mA
Feedback



Internal switches-
Mechanical or Reed.

Positioner

V200 E (electropneumatic) Options

V200 Benefits

- Compact Design
- Quality components = rugged and accurate performance
- External zero and span (complete calibration) adjustment without removing cover
- Easily maintain all key components
- Clear, visible indicator with arrow indicator standard-beacon optional
- Field changeable to any I/p option



V200E-Standard
Nema 4X Unit or
IS Unit



V200E-GA Gas
Approved Unit



V200-FF Fail
Freeze Unit



Extra High Temp
(EHT) +325° F



V200E-0/10 Volt Unit



V200-EX Explosion
Proof Unit



V200-EX with
Third Party
EX Switch

Technical Specifications:

Positioners:	Pneumatic		Electropneumatic	
	V200P	V200E & -IS	V200-EX	V200-FF
Input Signal	3-15 PSI	4-20mA	4-20 mA	4-20 mA
Supply Pressure	20-145 PSI	20-145 PSI	20-145 PSI	20-100 PSI
Linearity error	<0.7% f.s.	<1.0% f.s.	<0.8% f.s.	<1.2% f.s.
Hysteresis	<0.4% f.s.	<0.6% f.s.	<0.5% f.s.	<0.9% f.s.
Repeatability	<0.3% f.s.	<0.5% f.s.	<0.4% f.s.	<0.8% f.s.
Weight	3.2 lbs	3.8 lbs.	5.3 lbs.	5.4 lbs.
Temperature range	-40 to 185 °F -40 to 85 °C	-40 to 185 °F -40 to 85 °C	-40 to 185 °F -40 to 85 °C	-20 to 158 °F -20 to 70 °C
Extra High Temp (EHT)	-40 to 325 °F -40 to 162 °C			

	Low Bleed	Standard	High Gain	Super High Gain	Super High Gain/Flow
Air Delivery @87 PSI (600 kPa)	28 scfm	28.8 scfm	31.8 scfm	31.8 scfm	51 scfm
Bleed Rate @87 PSI (600 kPa)	<.2 scfm	.35 scfm	.53 scfm	.53 scfm	.71 scfm
Pressure Gain	240:1	300:1	800:1	1100:1	1100:1

Air connections	1/4" NPT	
Gauges	1/8" NPT	
Cable Entry	1/2" NPT	
Ingress & corrosion protection		NEMA 4X and IP66
Standard coating	Polyester	

Feedback

General:

Plug-in components directly into V200 series positioner housing
 Can combine switches and 4/20 feedback
 Conduit connections 1/2" NPT
 Enclosure Nema 4X/IP 66
 Operating temp -40 to +185 °F (-40 to +85 °C)

Mechanical Switches:

2-Type: SPDT, V3

Max Load:

Resistive	(Inductive)	Voltage
15 A	(3) A	125/250 VAC
0.25 A	(0.1) A	220 VDC
0.5 A	(0.2) A	110 VDC
8 A	(7) A	24 VDC

Reed Switches:

2-Type: SPDT-CO , Form C

Contact rating:	max 3W	
Voltage:	Switching	max 100 VDC
	Breakdown	min 200 VDC
Current:	Switching	max 0.20 A
	Carry	max 1.3 A

Contact resistance: 0.2 ohms

Contact capacitance: 0.3 pF

4/20 mA Position Feedback:

Voltage supply:	7-30 VDC
Output:	4-20 mA , 2 wire
Loop Impedance:	max 850 ohms @ 24 VDC
Linearity error:	<1.2%
Hysteresis:	<0.2%
Temp. Sensitivity:	< 0.1%/10 °F (5.5 °C)

Others Options:

Potentiometer-Namur Sensors - Third party EX mounting

Approvals

Ratings for hazardous locations:

V200-EX

ATEX-explosion protection

1487X, intrinsically safe EEx ia IIC T4/T5/T6
 E121X, flameproof EEx d IIC T4/T5/T6

FM and CSA

Explosion Proof CL I, II Div 1 Grp B-G

Intrinsically Safe

FM CL I-II-III Div 1 Grp A-G
 CSA CL II Div 1&2 Grp E-G
 CL III

Non Incendive

FM CL 1 Div2 Grp A-C

Temperature Class

	Short circuit	Ambient Temp
	Current-max	max
T6	50 mA	140 °F (60 °C)
T5	60 mA	158 °F (70 °C)
T4	60 mA	185 °F (85 °C)

V200-IS (Intrinsically Safe)

ATEX

EEx ia IIC T4/T6

FM

CL1 Div1 Grp A B C D

CSA

EX ia CL1 Grp A B C D
 EX ia CL 1 Div2 Grp A B C D



Ordering Codes:

Pneumatic	V200 P
Electro-pneumatic	V200 E
Explosion Proof	V200 EX
Intrinsically Safe	V200 IS
Fail Freeze	V200 FF

Spindle D1 Namur (standard)

For additional spindle options, please contact VAC or visit our website at www.vacaccessories.com

Front Cover

90 degree rotation	90
60 degree rotation	60
45 degree rotation	45
30 degree rotation	30
Blank scale	00

Indicator

Arrow	A
Beacon	B

Cam

45/90°	C1
30/60°	C2
60/120°	C3
(others available)	C4

Spool Valve Options (shipped with standard spool)

Low Bleed	LB
High Gain	HG
Super High Gain	SHG
Super High Gain/Flow	SHGHF

Feedback Options

2 SPDT Mechanical Switches	FB
2 SPDT Reed Switches	M
4-20 mA Transmitter	R
Mech Switches w/transmitter	mA
Reed Switches w/transmitter	MmA
1 K potentiometer	RmA
10 K potentiometer	1K
	10K

Options

Extra High Temp (Pneumatic only)	EHT
0/10 Volt I/P (V200E only)	0/10V
Gas Approved	GA
ATEX	ATEX

Example:

V200E-D1-90-B-C1-FB-MmA

Electropneumatic with namur spindle, 90 degree cover, raised indicator, 90 degree cam, feedback with mechanical switches and 4/20 mA transmitter.

V200 Options/Features:



Flexible mounting for rotary or linear applications



Various Spool Valve Options





Internal I/p with simple loop test points.




External zero and span adjustment-without removing the positioner cover – 3-15 or 6-30 PSI

V200 Dimensional Drawings

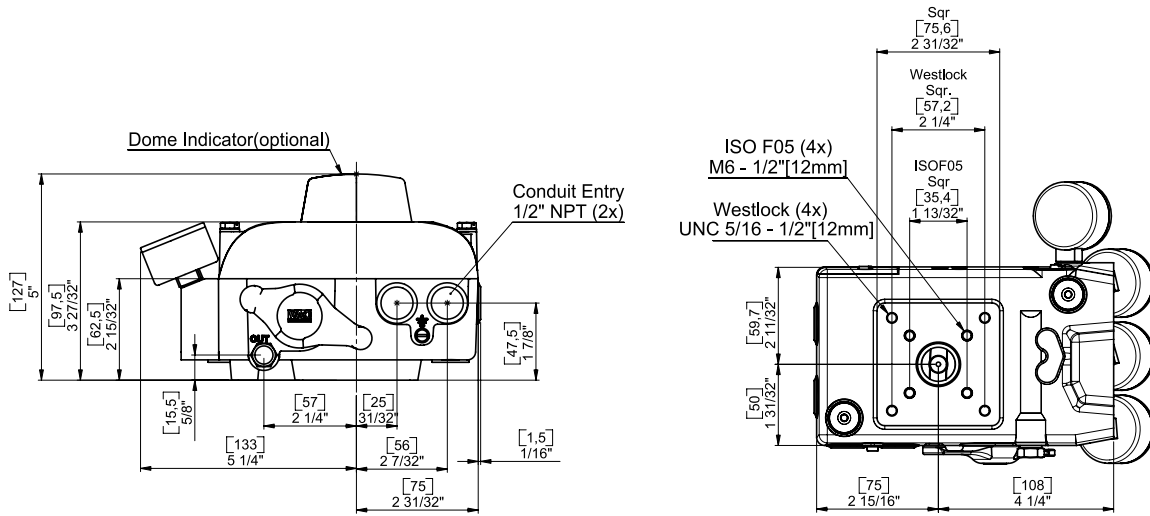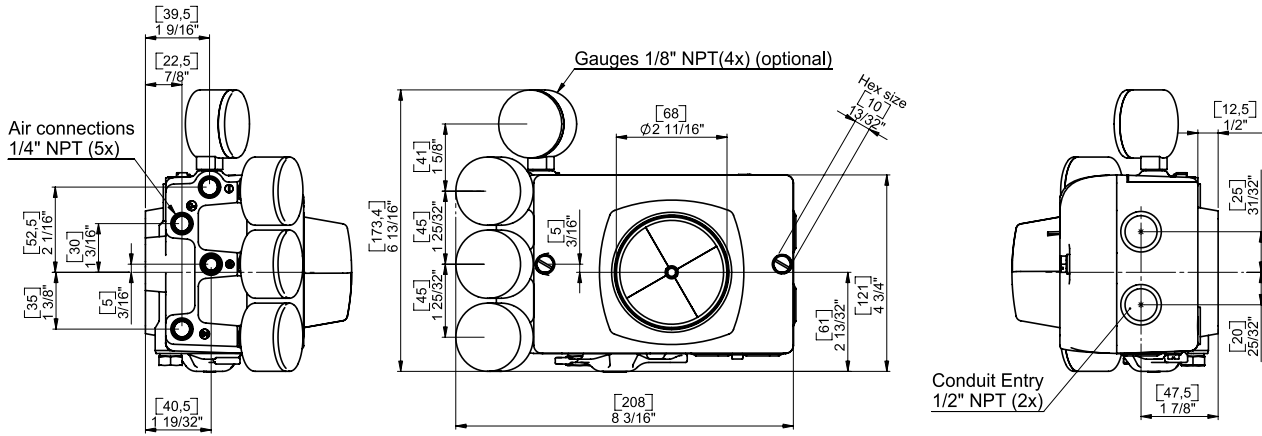


V200P, E, -IS

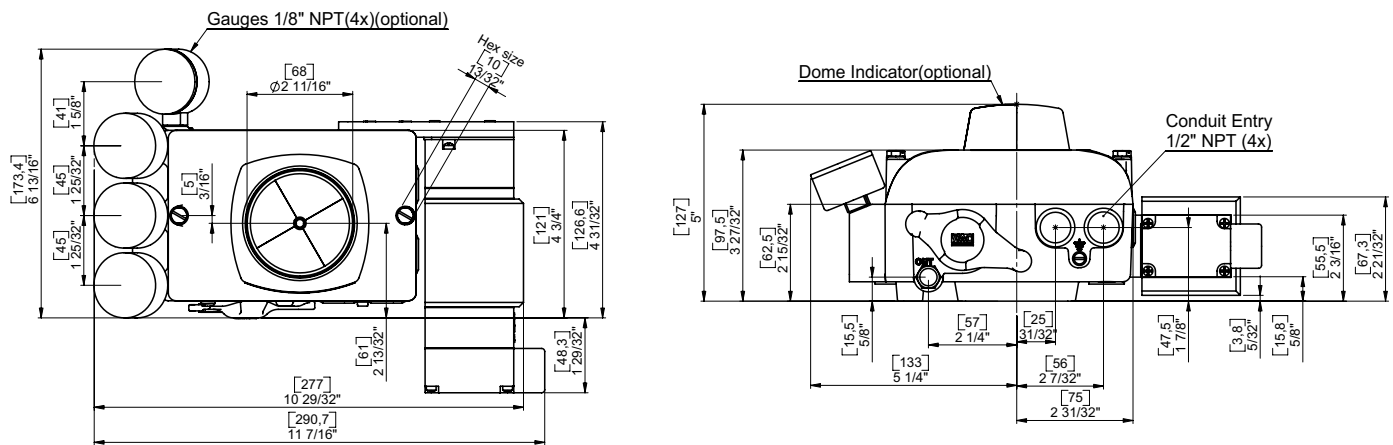


V200-FF

Gauges 1/8" NPT(4x)(optional)

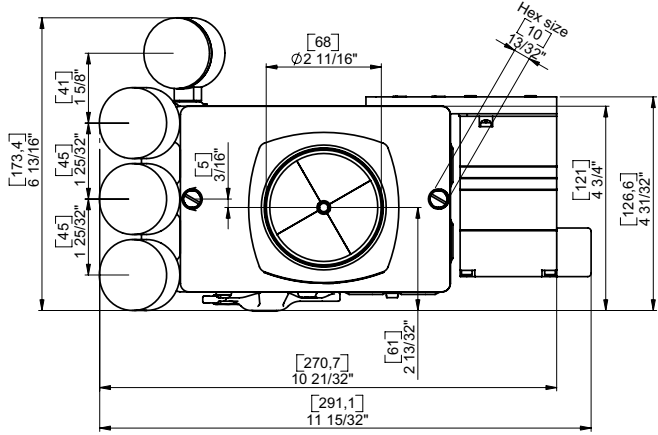


Dome Indicator(optional)

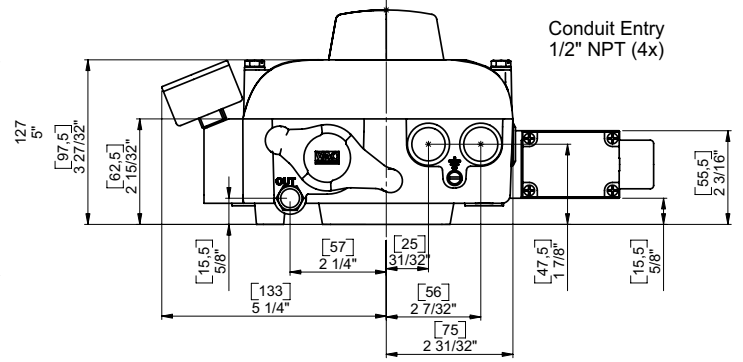


V200E 0-10V

Gauges 1/8" NPT(4x)(optional)

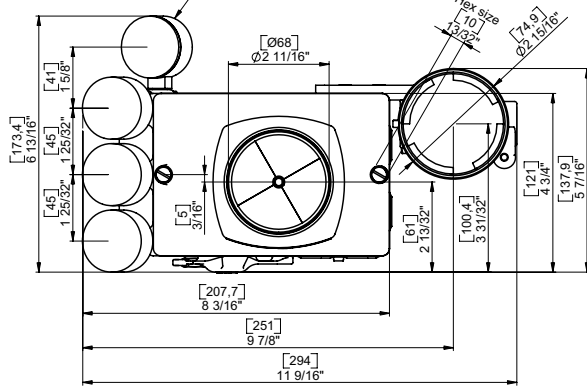


Dome Indicator(optional)

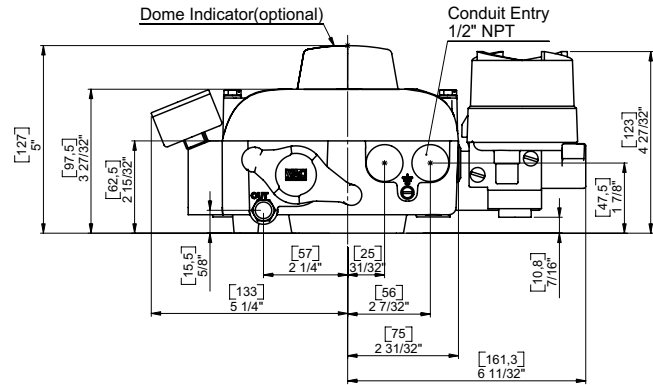


V200-EX

Gauges 1/8" NPT(4x)(optional)

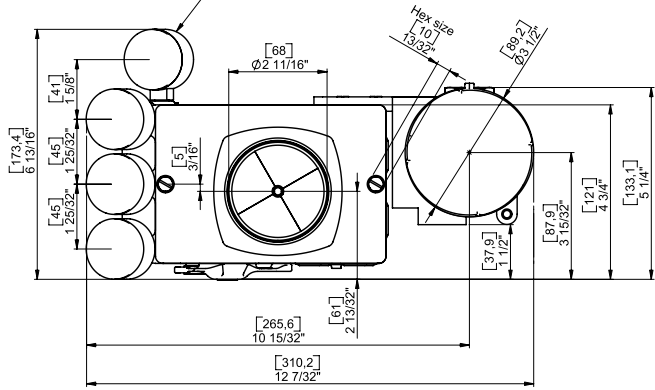

Dome Indicator(optional)

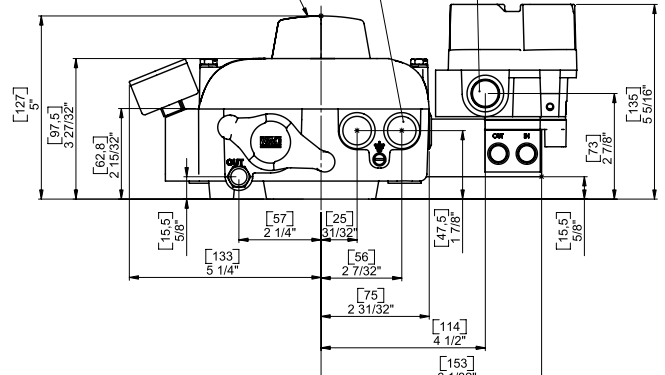

V200E-GA

NOTE: Inches appear in parentheses

Retrofit your valve with a VAC Positioner—a “choice” of options!

Most industrial control valves are equipped with the valve manufacturer's “standard” positioner when the valve is first delivered. As these companies move into new generation products, they often leave behind a whole marketplace of product needs that don't “fit” the application needs. When these manufacturers' standard positioners need replacing, what choices are you offered? High prices, poor delivery, or discontinued products leave users without many options.

VAC wants to put “choice” back in the hands of these users. From a very basic and simple, pneumatic unit to standard or EX electropneumatic, to a complete line of digital positioners, the choice of replacing the manufacturer's “standard” positioner is back in your hands. VAC products offer the control accuracy you need, yet a simple rugged design (all metal housings) that is flexible and adaptable. The installed base of control valves is very important to users and to VAC.

We want to offer you either rotary or linear positioner products that “fit” the needs of the application and not limit your options. Retrofit with a VAC positioner, putting your positioner options back in your control.



Our way of doing business is just as simple as our products.

A solid, simply designed positioner, with high quality construction is just the start of the Valve Accessories and Controls story. Because we are a privately held, customer driven company, we can meet your needs much quicker, with a lot more flexibility.

A quality company must be a lot more than a quality product. Responding promptly and honestly, showing genuine interest in what we do and what you do, staying focused on our strengths, and being different in a positive way are important.

Sounds simple—we plan to keep it that way!



VALVE ACCESSORIES & CONTROLS

200 Jade Park
Chelsea, AL 35043
TEL: 205-678-0507
FAX: 205-678-0510
info@vacaccessories.com

VALVE ACCESSORIES & CONTROLS

12942 Bedford Falls Drive
Cypress, TX 77429
TEL: 713-493-2624
Cell: 713-253-7781
FAX: 281-256-9399
randye@vacaccessories.com

BUDENBERG GAUGE CO. LTD

4 Gilchrist Road • Northbank Industrial Park
Irlam • Manchester • M44 5AY
TEL: Tel: +44 7815 188 179
FAX: +44 844 372 8925
budenbergnc@btconnect.com