




GAS VALVES

720 Series - Lever Actuated

The Robertshaw® 720 Series Lever Actuated Gas Valves are designed for intermittent pilot ignition applications. This series incorporates a manual valve, pilot valve, dual automatic valves (2), and a main gas pressure regulator. Uni-Kit® models are factory set at 3.5" WC for natural gas, but can be converted to LP by installing the regulator conversion kit included. The 720 Series is designed for many residential applications such as central heating units, space heaters, wall heaters, boilers, and mobile home furnaces. This valve has a compact swing radius of only 3-9/16" to enable it to fit a wide range of OEM replacement applications.

Features and Benefits

- Pilot outlet 1/4" tubing
- 1/4" quick connect terminal type
- Ambient temperature of -40°F to 175°F
- Maximum inlet pressure 14" WC (0.5 PSI)
- Standard NEMA terminals
- Rated as NEC Class 2
- Inlet filtered screen
- Various gas types: natural, manufactured, mixed, LP, and LP/air mixtures
- RoHS compliant

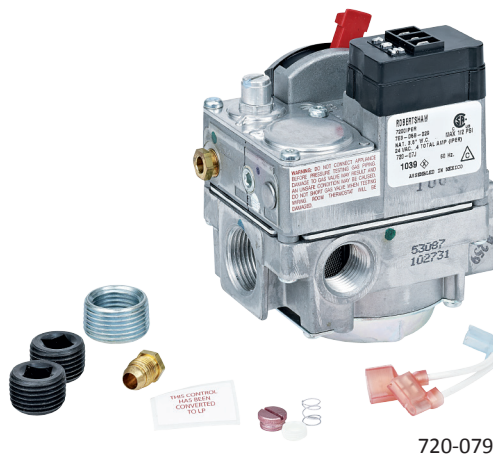

720-079

Specifications

Part Numbers	Description	Capacity	Inlet Size	Outlet Size	Pressure Regulator Setting	Electrical Rating	Comments
720-070	Slow Opening Model	150,000 BTU	1/2"	3/4"	Uni-Kit® Natural Gas	24V AC , 50/60 Hz, 45 Amps, 5 Watts	Has slow-opening feature for soft ignition. Not normally used on hot surface applications
720-079	Universal Model	150,000 BTU	1/2"	3/4"	Uni-Kit Natural Gas	24V AC , 50/60 Hz, 45 Amps, 5 Watts	Use on surface, spark pilot or direct spark ignition

RoHS



1 Year Limited Warranty

D13