


Permanent Split Capacitor Commercial Condenser Fan

Open Dripproof & Totally Enclosed, Air Over

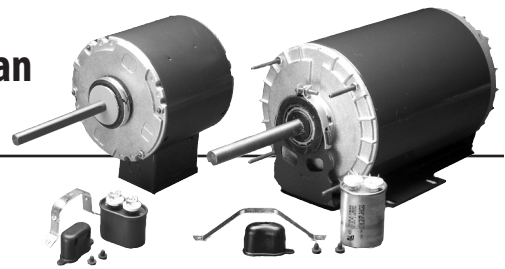

APPLICATIONS:

For use on condenser cooling fans in commercial air conditioning applications.

FEATURES:

- Capacitor and Outlet Box Included, unless noted
- Reversible Rotation
- Double-Sealed Ball Bearings
- Continuous Duty, Air Over
- Automatic Reset Thermal Overload Protector
- 40°C Ambient
- Dual Voltage
- Class B Insulation
- **Discount Symbol: DS-3HAC**




Figure A




Figure B

5.6" Diameter, All Angle Mounting, Hub Ring Mount (2 1/4") (Fig. A)

HP	RPM/Spds.	Volts	Catalog Number	List	Bearings	Cap MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wgt.	Notes	OEM
1/3	1075	208-230/460	6727	\$287	Ball	5	2.4/1.2	5	5.9	5.3	11.4	N/A	17		
1/2	1075	208-230/460	7475	\$366	Ball	10	2.8/1.4	5	6.4	5.8	11.9	N/A	20		
	1075	208-230/460	2201	\$413	Ball	10	3.2/1.6	5	7.4	6.8	12.8	N/A	20	67	
	1075	208-230	8868	\$241	Ball	10	3.8	3.0	--	6.3	9.3	.63	21	H15, H44	
3/4	1075	208-230/460	2202	\$404	Ball	12.5	4.6/2.3	5	8.4	7.8	13.8	N/A	23	66, 67	
	1075	208-230/460	6603	\$428	Ball	7.5	5.0/2.5	5	6.9	6.3	12.4	N/A	22	66, H16	
	1075	208-230/460	5489	\$428	Ball	7.5	5.0/2.5	5	6.9	6.3	12.3	N/A	22	65, 66, H15	
	1075	460	8233	\$313	Ball	12.5	2.7	3	6.6	6.0	10.2	N/A	19	65, 66, H15	AA
1	1080	460	8055	\$532	Ball	15.0	2.5	5.0	--	6.6	11.6	N/A	20	H16, H29	LE

6.3" Diameter, All Angle Mounting, Hub or Stud Mount (4) (Fig. A with 5/8" shaft)

HP	RPM/Spds.	Volts	Catalog Number	List	Bearings	Cap MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wgt.	Notes	OEM
1/2	825	208-230	3568	\$482	Ball	10.0	3.6	6.0	7.0	6.0	13.4	1.5	25	65, 66, H15	
3/4	1075	208-230	3566	\$516	Ball	15.0	3.8	6.0	7.0	6.0	13.4	1.5	26	65, 66, H15	
	825	208-230	3567	\$563	Ball	17.5	5.3	6.0	8.2	7.8	14.6	1.5	32	65, 66, H15	
1	1075	208-230	3565	\$458	Ball	17.5	5.2	6.0	7.5	6.5	13.9	1.5	30	65, 66, H15	
	1075	208-230/460	2203	\$455	Ball	17.5	5.2/2.6	6.0	10.4	9.9	16.9	1.5	40	67	
	1075	208-230/460	8431	\$428	Ball	12.5	5.8-5.4/2.7	6.0	9.9	9.4	16.4	1.8	41	65, 67	
1-1/2	1075	208-230/460	2204	\$472	Ball	20.0	7.6/3.8	6.0	10.9	10.3	16.9	1.5	43	67	

6.3" Diameter, Resilient Base (Fig. B)

HP	RPM/Spds.	Volts	Catalog Number	List	Bearings	Cap MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wgt.	Notes	OEM
3/4	1075	208-230/460	2193	\$728	Ball	30.0	4.8/2.5	4.1	8.3	7.8	13.1	--	41	H15, H16	
1	1075	208-230/460	2686	\$569	Ball	17.5	5.1/2.6	5.0	10.5	9.3	15.8	1.5	38	68	
1-1/2	1075	208-230/460	2896	\$609	Ball	20.0	7.5/3.8	5.0	11.0	9.8	16.3	1.5	47	67, 68	

AA = Aaron LE = Lennox

Note 65 Ventilated (In wet applications, position vent holes at bottom of motor; use rain shield if used shaft up.)

Note 66 No Outlet Box. Includes Leads

Note 67 Capacitor not included, Internal Conduit Box

Note 68 Quick Change Voltage Receptacle, No Outlet Box

Note H15 Capacitor Not Included

Note H16 CCWLE Rotation Only

Note H29 Includes Rain Shield, Shaft-up Mounting

Note H44 Stud Mount

† All marks shown within this document are properties of their respective owners