


Permanent Split Capacitor Packaged Terminal A/C – Heat Pump Open, Air Over

APPLICATIONS:

Designed to meet manufacturer's requirements for use in package terminal air conditioners or heat pump units.

FEATURES:

- Bearings Have All Angle Thrust System
- Designed for use with 370V Capacitors
- Continuous Duty, Air Over
- Automatic Reset Thermal Overload Protector

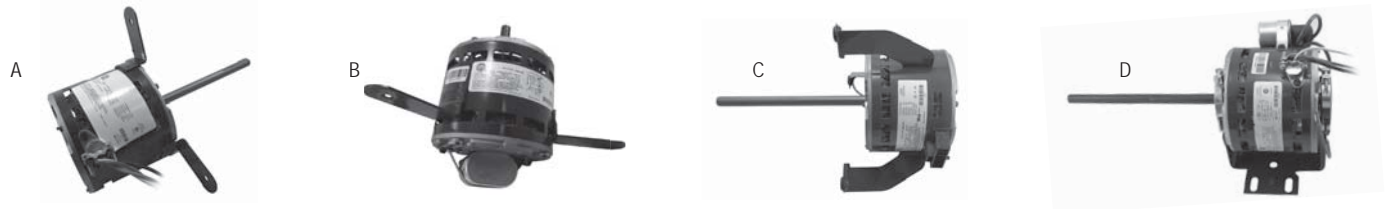

Single Shaft, Direct Drive Blower - 5.0" Diameter

HP	RPM / Spds.	Voltage	Catalog Number	Cap MFD	Amps	Shaft Length	Total Length	Mount	Fig.	Rotation	Ship Wt.	Notes	OEM
1/15	1040/3	115	1377	7.5	1.3	6.5	10.6	Flex	C	CCWLE			
1/30	1100/3	115	1374	5.0	0.50	8.5	13.6	Resilient	D	CWLE	9	64	TR
	1100/3	115-127	4125	4.0	0.53	8.0	13.2	Resilient	D	CCWLE	12	64	IE
	1600/3	115-127	1269	3.0	0.51	6.5	11.4	Resilient	D	CCWLE	7		IE
	1100/3	115	1218	7.5	0.73	7.0	10.8	Flex	C	CCWLE	7		IE
	1100/3	277	1259	3.0	0.32	7.0	10.8	Flex	C	CCWLE	5		IE
1/20	1100/3	115	1258	7.5	1.10	7.0	10.8	Flex	C	CCWLE	10		IE
	1100/3	115	1676	5.0	0.55	8.9	13.1	Resilient	D	CWLE	12	64	TR
	1075/3	208-230	1378	5.0	0.55	6.5	10.6	Flex	C	CCWLE	12		IE
	1075/3	277	4137	4.0	0.55	6.5	9.9	3 Lugs	A	CCWLE	9		IE
	1100/3	277	1264	3.0	0.42	7.0	10.8	Flex	C	CCWLE	7		IE
1/16	850/3	277	1678	4.0	0.50	2.3	6.3	3 Lugs	B	CWLE	12	64	TR
1/15	1075/3	265	1365	4.0	0.60	7.0	10.8	Flex	C	CCWLE	8		IE
1/12	1375/3	115-127	1211	6.0/7.5	1.35	6.5	11.4	Resilient	D	CCWLE	7	64	IE
1/5	925/3	208-240	4129	6.0	1.90	7.0	11.6	Flex	C	CCWLE	8	98	IE
1/4	970/3	115	4130	12.5	6.00	7.0	11.8	Flex	C	CCWLE	8		IE
	1050/3	277	1962	7.5	1.60	7.0	12.6	Flex	C	CCWLE	8		IE

TR = Trane IE = IEC FI = First

U.S. MOTORS® Catalog Number	OEM Number	Industry Number	U.S. MOTORS® Catalog Number	OEM Number	Industry Number
1211	70556336	-----	1678	X70500269-01/MOT2852	5KSP29DK1507S
1218	705563-01	-----	1961	705563-09	SKCP29DK6018S
1258	705563-02		1962	700215-48	5KCP29MK6109S
1259	70556307	5KCP29BK6016AS	4125	700216-92	5KCP29BK5875S
1264	70556308	5KCP29FK6017S	4129	700215-42	SKCP29KK4878AS
1269	70556329	-----	4130	700215-21	SKCP29MK6102S
1374	7/MOT1878	5KSP29DK1507S	4136	705563-14	5KCP29FK6023S
1676	X70500149-02	5KSP29DK1507S	4137	700215-45	SKCP29FK9775

Note 64: Capacitor Included
Note 98: 60/50 Hz

† All marks shown within this document are properties of their respective owners.



Permanent Split Capacitor Packaged Terminal A/C – Heat Pump Open, Air Over (continued)



Dual Shaft, Direct Drive Blower - 5.0" Diameter

HP	RPM / Spds.	Voltage	Catalog Number	Cap MFD	Amps	Shaft N	Shaft XN	Total Length	Mount	Fig.	Rotation	Ship Wt.	Notes	OEM
1/15	1100/3	115	1090	5.0	0.80	9.7	10.8	25.4	Resilient	E	CWLE	13		TR
1/12	1375/3	115-120	1256	6.0	1.40	8.3	8.3	21.9	Resilient	E	CCWLE	11		IE
	1150/3	277	1960	5.0	0.69	8.3	7.6	21.2	Hub	F	CCWLE	9		IE
1/8	1500/3	277	1964	4.0	0.80	8.3	7.8	21.2	Resilient	E	CCWLE	9		IE
1/6	1625/4	115	8525	5.0	2.20	9.4	9.4	24.0	Resilient	E	CCWLE	9		
	1350/3	115-127	1210	5.0	1.80	8.3	8.0	21.7	Resilient	E	CCWLE	10	98	IE
	1450/3	115-120	1257	7.5	2.50	8.3	8.3	21.9	Resilient	E	CCWLE	11		IE
	1500/3	115	1192	7.5	2.30	10.0	10.0	25.1	Resilient	E	CWLE	10		
1/5	1625/3	208-230	1353	5.0	1.2	9.2	9.2	23.6	Resilient	E	CCWLE	10		
1/4	1625/2	208-230	1279	5.0	1.40	9.0	9.0	23.2	Resilient	E	CCWLE	13		FI

TR = Trane IE = IEC FI = First

U.S. MOTORS® Catalog Number	OEM Number	Industry Number	U.S. MOTORS® Catalog Number	OEM Number	Industry Number
1090	X70500149-04 / MOT1877, X70500149-01	5KSP29KD1507S	1257	700215-17	-----
1192	-----	955	1279	M10	-----
1210	70556335	-----	1960	7055263-26	5KCP29BK6366S
1256	700215-16	-----	1964	-----	SKCP29CK8613S



Single Shaft, Direct Drive Blower - 5.6" Diameter

HP	RPM / Spds.	Voltage	Catalog Number	Cap MFD	Amps	Shaft Length	Total Length	Mount	Fig.	Rotation	Ship Wt.	OEM
1/12	1250/2	265	1954	4.0	0.60	2.3	6.1	Band	G	CCWLE	10	AM
1/10	810/3	277	1679	5.0	0.51	2.5	6.6	3 Lugs	H	CWLE	13	TR

AM = Amana TR = Trane

U.S. MOTORS® Catalog Number	OEM Number	Industry Number
1679	X70500270-01/MOT2853	5KSP29DK1507S
1954	C61148-2	5KCP39CGD588BS

Note 98: 60/50 Hz

† All marks shown within this document are properties of their respective owners.



Permanent Split Capacitor Packaged Terminal A/C-Heat Pump 5.6" Diameter, Open, Air Over *(continued)*

J



K



Dual Shaft, Direct Drive Blower - 5.6" Diameter

HP	RPM / Spds.	Voltage	Catalog Number	Cap MFD	Amps	Shaft N	Shaft XN	Total Length	Mount	Fig.	Rotation	Ship Wt.	OEM
1/8	1075/3	277	1042	5	0.76	8.4	8.4	21.7	Hub Ring	J	CCWLE	9	
1/5	1040/3	277/265	3360	3	1.30	7.0	3.0	13.8	Lug	K	CWLE	14	CA

CA = Carrier

U.S. MOTORS® Catalog Number	OEM Number	Industry Number
3360	HC37MB730	4

† All marks shown within this document are properties of their respective owners.

